



# Technical File

## Argu Baffle

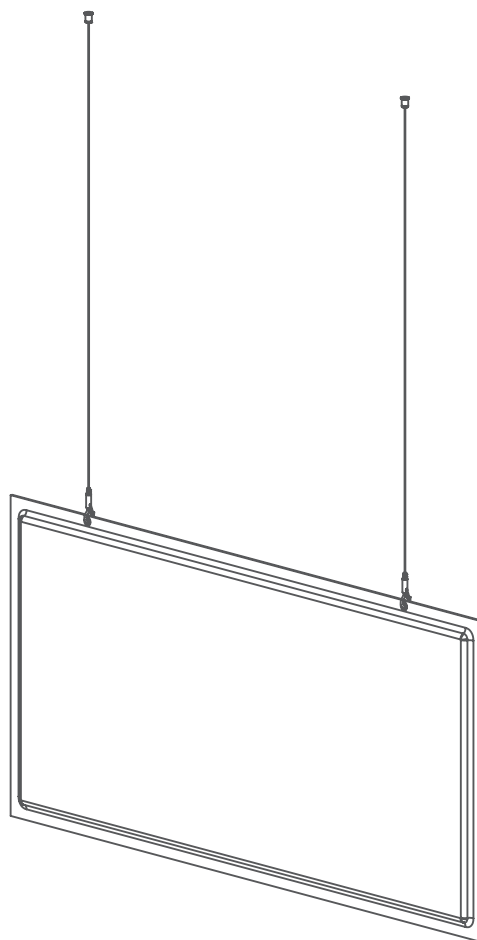

# 01

## Dimensions

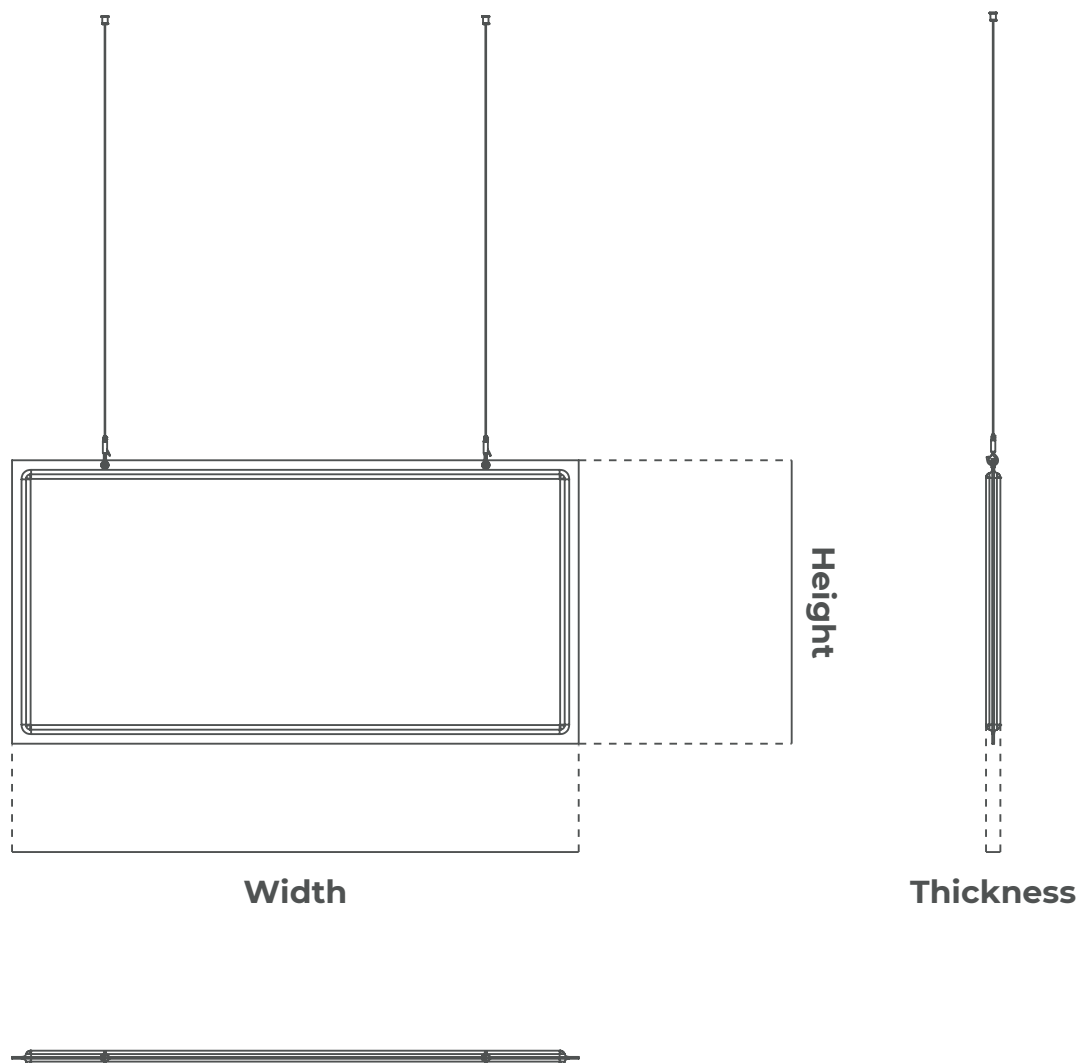


### Argu Baffle

Width: 1190 mm   Height: 595 mm   Thickness: 30 mm


# 02

## Finishes




**Composition** 100% Polyester  
**Weight** 200 gr/m<sup>2</sup>  
**Thickness** 1,75 mm  
**Colour Fastness to light** EN ISO 105-B02: 6-7  
**Flame Retardancy** EN 13501-1: B-s1,d0  
**Abrasion resistance** 50 000 Cycles  
**STANDARD 100 by OEKO-TEX®**

**Felt | Solid Colour**  
Pearl




**Composition** 100% Polyester  
**Weight** 200 gr/m<sup>2</sup>  
**Thickness** 1,75 mm  
**Colour Fastness to light** EN ISO 105-B02: 6-7  
**Flame Retardancy** EN 13501-1: B-s1,d0  
**Abrasion resistance** 50 000 Cycles  
**STANDARD 100 by OEKO-TEX®**

**Felt | Solid Colour**  
Storm



**Composition** 100% Polyester  
**Weight** 200 gr/m<sup>2</sup>  
**Thickness** 1,75 mm  
**Colour Fastness to light** EN ISO 105-B02: 6-7  
**Flame Retardancy** EN 13501-1: B-s1,d0  
**Abrasion resistance** 50 000 Cycles  
**STANDARD 100 by OEKO-TEX®**

**Felt | Solid Colour**  
Indigo Blue




**Composition** 100% Polyester  
**Weight** 200 gr/m<sup>2</sup>  
**Thickness** 1,75 mm  
**Colour Fastness to light** EN ISO 105-B02: 6-7  
**Flame Retardancy** EN 13501-1: B-s1,d0  
**Abrasion resistance** 50 000 Cycles  
**STANDARD 100 by OEKO-TEX®**

**Felt | Melange Finish**  
Pewter




**Composition** 100% Polyester  
**Weight** 200 gr/m<sup>2</sup>  
**Thickness** 1,75 mm  
**Colour Fastness to light** EN ISO 105-B02: 6-7  
**Flame Retardancy** EN 13501-1: B-s1,d0  
**Abrasion resistance** 50 000 Cycles  
**STANDARD 100 by OEKO-TEX®**

**Felt | Melange Finish**  
Espresso




**Composition** 100% Polyester  
**Weight** 200 gr/m<sup>2</sup>  
**Thickness** 1,75 mm  
**Colour Fastness to light** EN ISSO 105-B02: 6-7  
**Flame Retardancy** EN 13501-1: B-s1,d0  
**Abrasion resistance** 50 000 Cycles  
**STANDARD 100 by OEKO-TEX®**

**Felt | Melange Finish**  
Lemon




**Composition** 100% Polyester  
**Weight** 200 gr/m<sup>2</sup>  
**Thickness** 1,75 mm  
**Colour Fastness to light** EN ISSO 105-B02: 6-7  
**Flame Retardancy** EN 13501-1: B-s1,d0  
**Abrasion resistance** 50 000 Cycles  
**STANDARD 100 by OEKO-TEX®**

**Felt | Melange Finish**  
Ruby



**Composition** 100% Polyester  
**Weight** 200 gr/m<sup>2</sup>  
**Thickness** 1,75 mm  
**Colour Fastness to light** EN ISSO 105-B02: 6-7  
**Flame Retardancy** EN 13501-1: B-s1,d0  
**Abrasion resistance** 50 000 Cycles  
**STANDARD 100 by OEKO-TEX®**

**Felt | Melange Finish**  
Kelly



**Composition** 100% Polyester  
**Weight** 200 gr/m<sup>2</sup>  
**Thickness** 1,75 mm  
**Colour Fastness to light** EN ISSO 105-B02: 6-7  
**Flame Retardancy** EN 13501-1: B-s1,d0  
**Abrasion resistance** 50 000 Cycles  
**STANDARD 100 by OEKO-TEX®**

**Felt | Melange Finish**  
Cerulean