




01

Dimensions

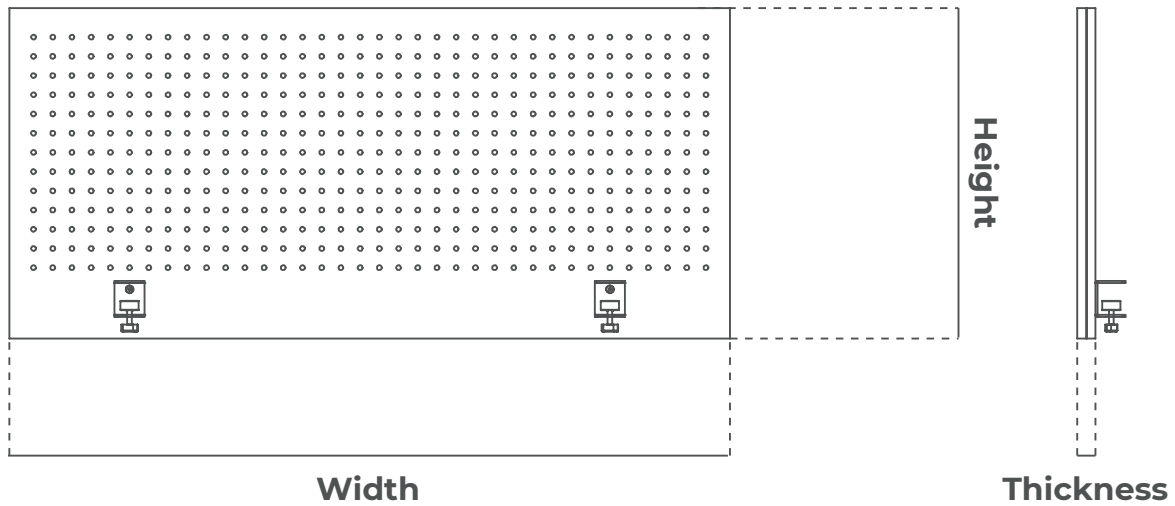


Desk Fix
LATERAL

Width: 600mm Height: 550mm Thickness: 24mm
Width: 700mm Height: 550mm Thickness: 24mm

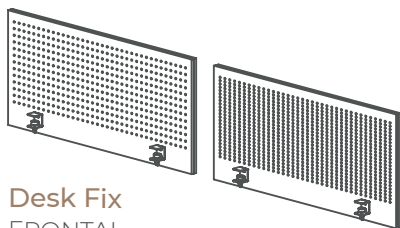

Desk Fix
FRONTAL

Width: 1200mm Height: 550mm Thickness: 24mm
Width: 1400mm Height: 550mm Thickness: 24mm
Width: 1600mm Height: 550mm Thickness: 24mm
Width: 1800mm Height: 550mm Thickness: 24mm

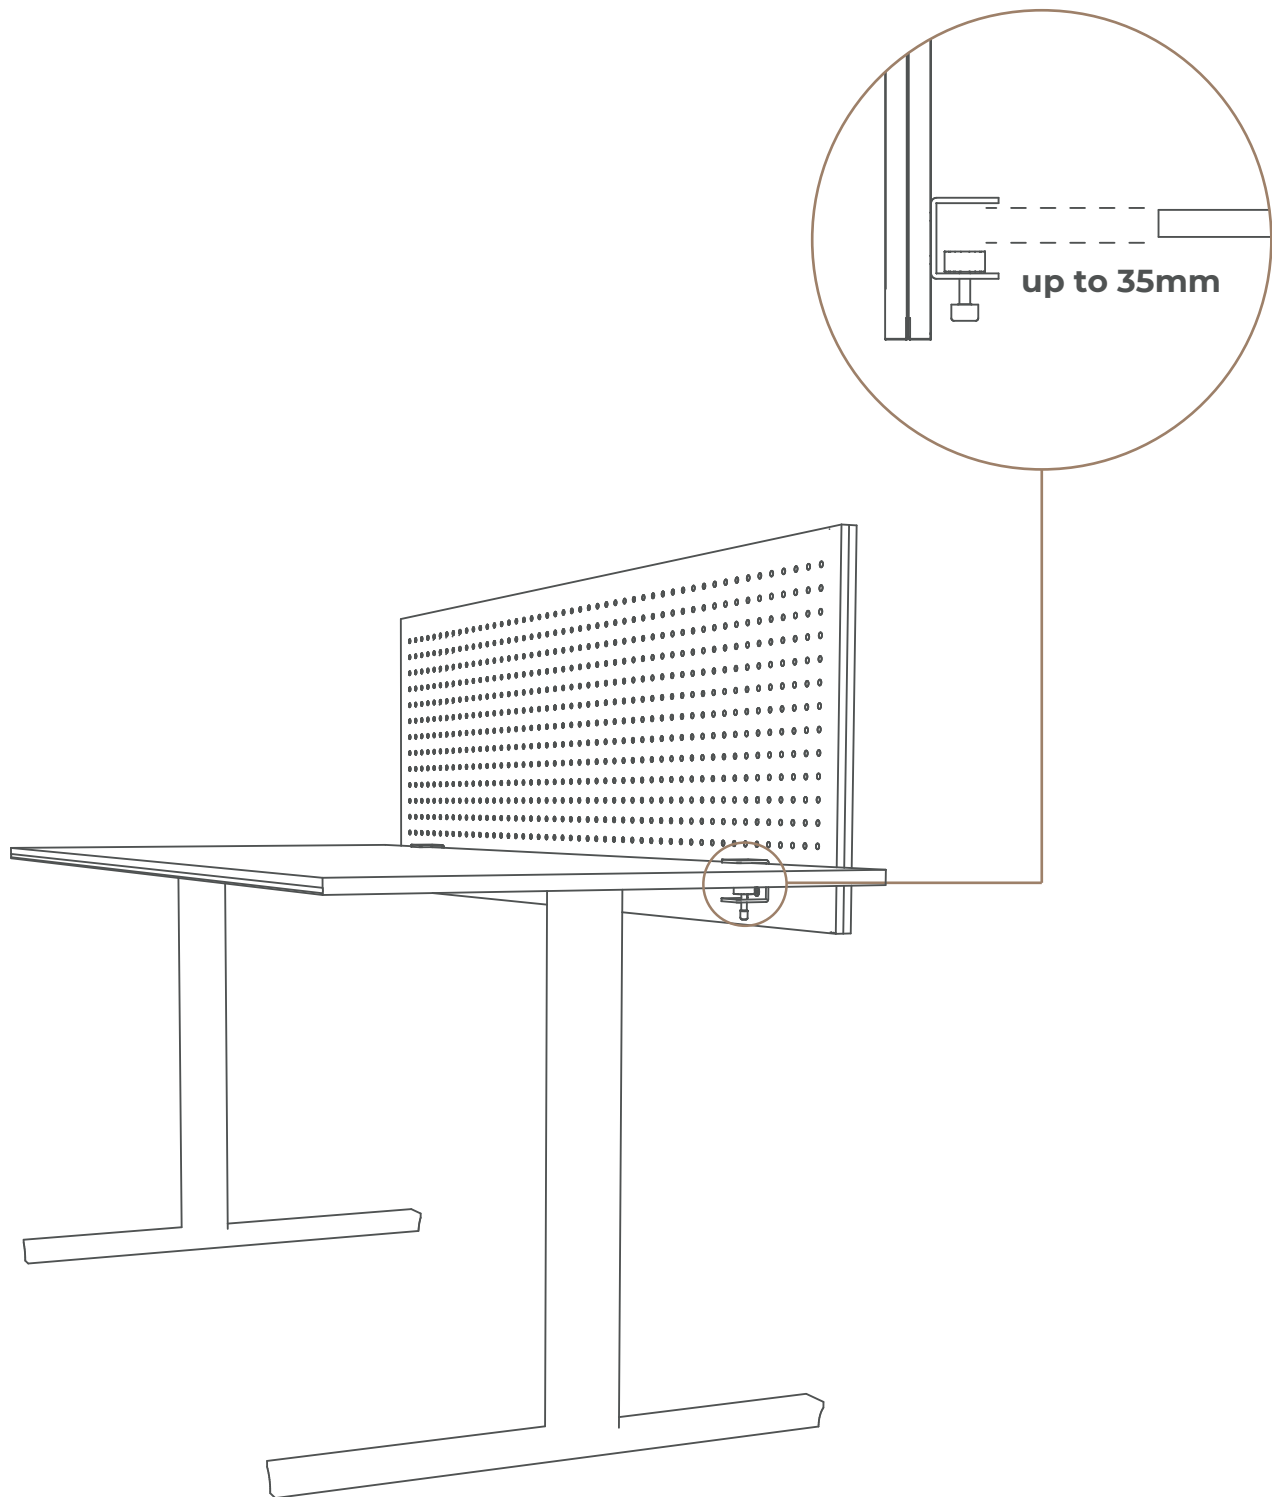


02

Finishes



Composition Painted Birch Plywood
Thickness 15 mm
FSC certified
PEFC certified
Harvested under EU timber regulations

Lacquered Finish
White




Composition Painted Birch Plywood
Thickness 15 mm
FSC certified
PEFC certified
Harvested under EU timber regulations

Lacquered Finish
Grey



Composition Laminated Birch Plywood
Thickness 15 mm
Wear Resistance ISO 4586-1/2: 350 Cycles
Stain Resistance ISO 4586-1/2: 5
Fully cleanable and disinfected
FSC certified
PEFC certified
Harvested under EU timber regulations

Laminated Finish
Beige Gaudi



Composition Laminated Birch Plywood
Thickness 15 mm
Wear Resistance ISO 4586-1/2: 350 Cycles
Stain Resistance ISO 4586-1/2: 5
Fully cleanable and disinfected
FSC certified
PEFC certified
Harvested under EU timber regulations

Laminated Finish
Grey Stone



Composition Laminated Birch Plywood
Thickness 15 mm
Wear Resistance ISO 4586-1/2: 350 Cycles
Stain Resistance ISO 4586-1/2: 5
Fully cleanable and disinfected
FSC certified
PEFC certified
Harvested under EU timber regulations

Laminated Finish

Lino Blanco



Composition Laminated Birch Plywood
Thickness 15 mm
Wear Resistance ISO 4586-1/2: 350 Cycles
Stain Resistance ISO 4586-1/2: 5
Fully cleanable and disinfected
FSC certified
PEFC certified
Harvested under EU timber regulations

Laminated Finish

Lino Gris




Thickness 8 mm
Transparency Clear

Acrylic

Clear


Technical File

Keen Line - Desk Fix

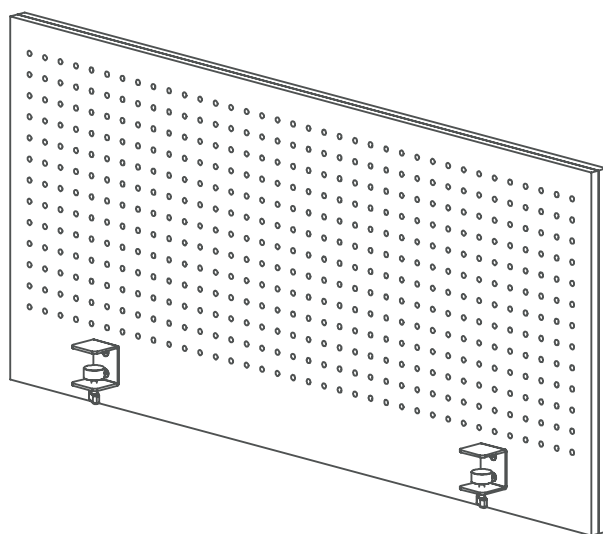


Technical File

Keen Line - Desk Fix | Acrylic Guard

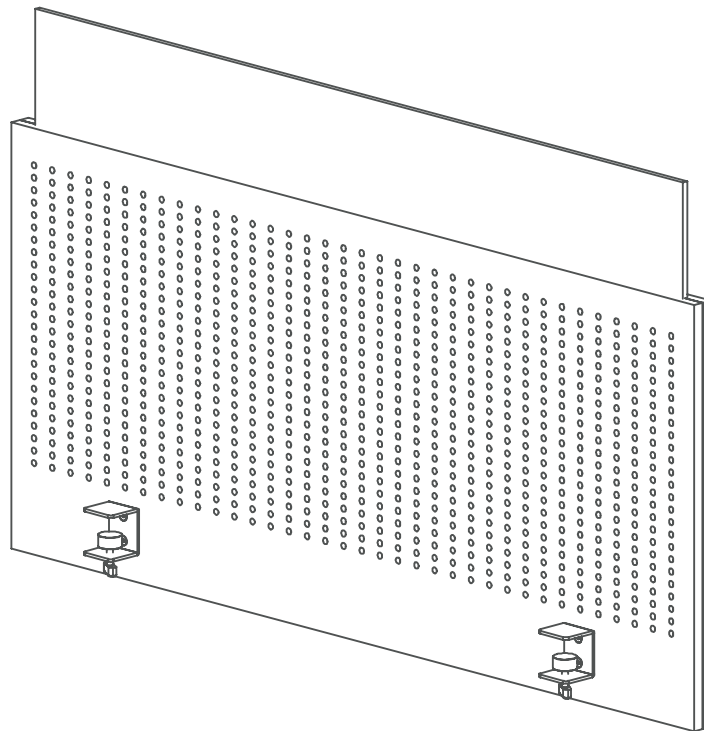

01


Dimensions

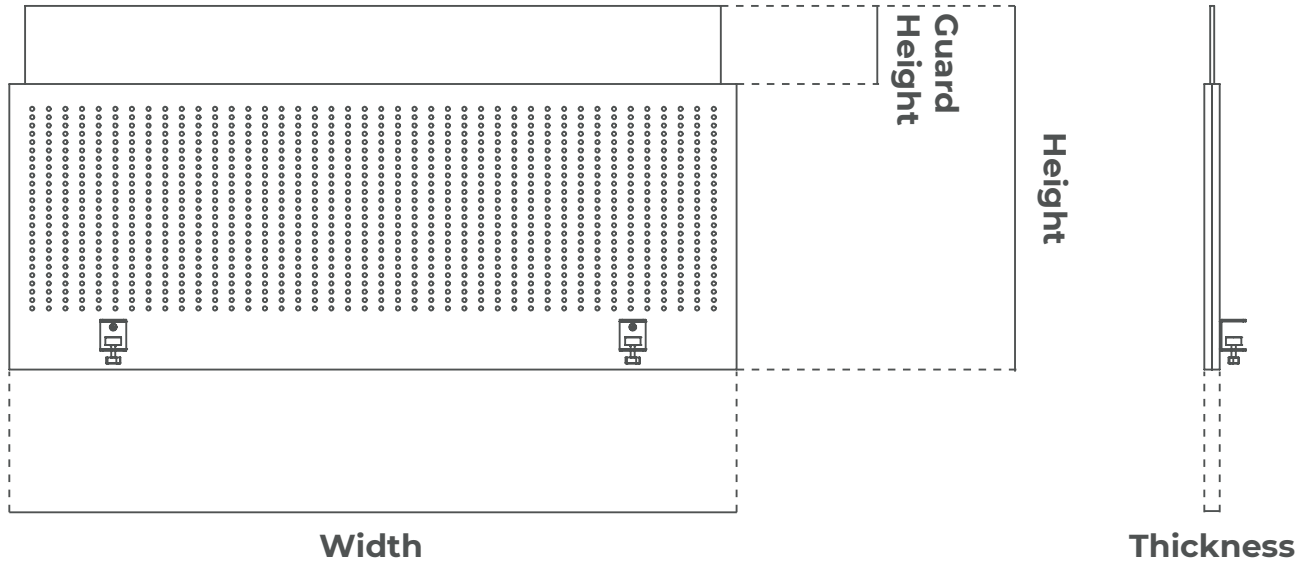

Desk Fix | Acrylic Guard

LATERAL



Width: 600mm Height: 700mm Acrylic Guard Height: 150mm Thickness: 24mm
 Width: 700mm Height: 700mm Acrylic Guard Height: 150mm Thickness: 24mm



Desk Fix | Acrylic Guard

FRONTAL

Width: 1200mm Height: 700mm Acrylic Guard Height: 150mm Thickness: 24mm
 Width: 1400mm Height: 700mm Acrylic Guard Height: 150mm Thickness: 24mm
 Width: 1600mm Height: 700mm Acrylic Guard Height: 150mm Thickness: 24mm
 Width: 1800mm Height: 700mm Acrylic Guard Height: 150mm Thickness: 24mm

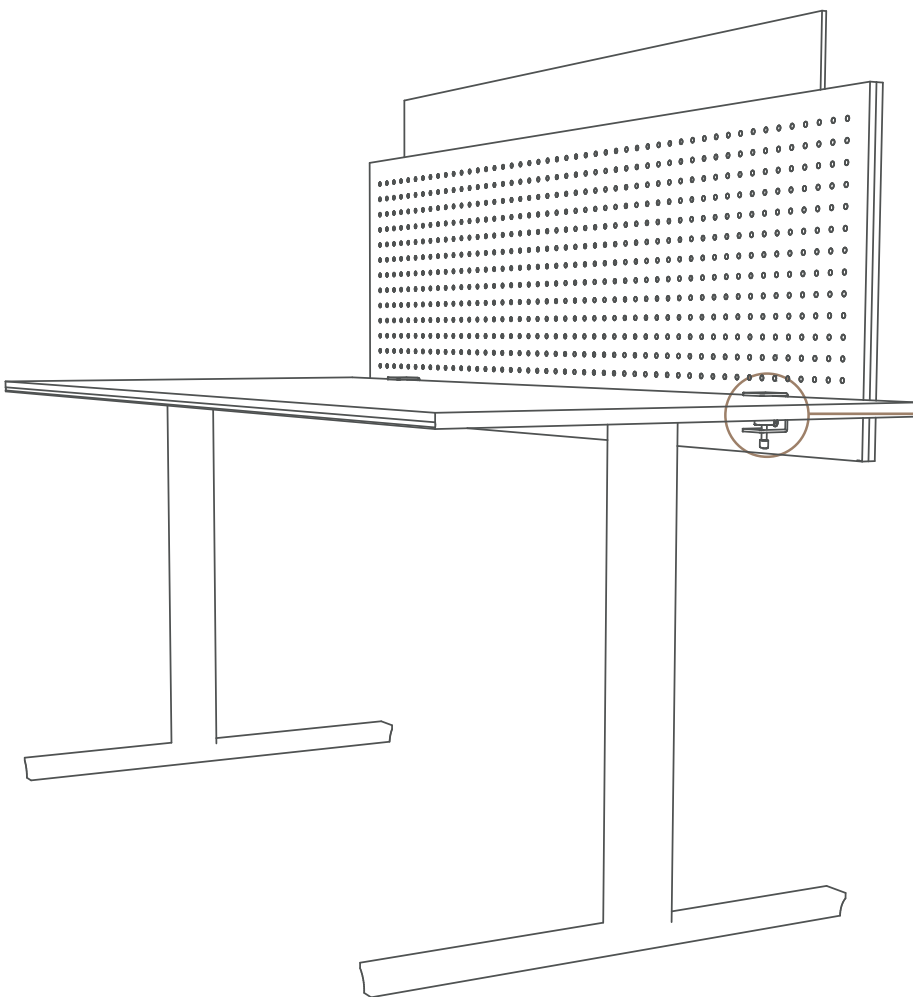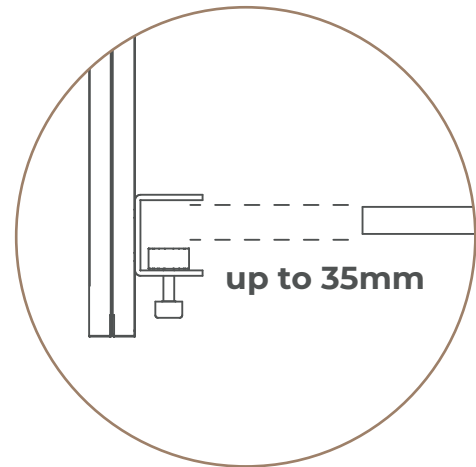


02

Finishes



Composition Painted Birch Plywood
Thickness 15 mm
FSC certified
PEFC certified
Harvested under EU timber regulations

Lacquered Finish
White




Composition Painted Birch Plywood
Thickness 15 mm
FSC certified
PEFC certified
Harvested under EU timber regulations

Lacquered Finish
Grey



Composition Laminated Birch Plywood
Thickness 15 mm
Wear Resistance ISO 4586-1/2: 350 Cycles
Stain Resistance ISO 4586-1/2: 5
Fully cleanable and disinfected
FSC certified
PEFC certified
Harvested under EU timber regulations

Laminated Finish
Beige Gaudi



Composition Laminated Birch Plywood
Thickness 15 mm
Wear Resistance ISO 4586-1/2: 350 Cycles
Stain Resistance ISO 4586-1/2: 5
Fully cleanable and disinfected
FSC certified
PEFC certified
Harvested under EU timber regulations

Laminated Finish
Grey Stone



Composition Laminated Birch Plywood
Thickness 15 mm
Wear Resistance ISO 4586-1/2: 350 Cycles
Stain Resistance ISO 4586-1/2: 5
Fully cleanable and disinfectable
FSC certified
PEFC certified
Harvestered under EU timber regulations

Laminated Finish


Lino Blanco



Composition Laminated Birch Plywood
Thickness 15 mm
Wear Resistance ISO 4586-1/2: 350 Cycles
Stain Resistance ISO 4586-1/2: 5
Fully cleanable and disinfectable
FSC certified
PEFC certified
Harvestered under EU timber regulations

Laminated Finish

Lino Gris




Thickness 8 mm
Transparency Clear

Acrylic

Clear




Technical File

Keen Line - Free Standing

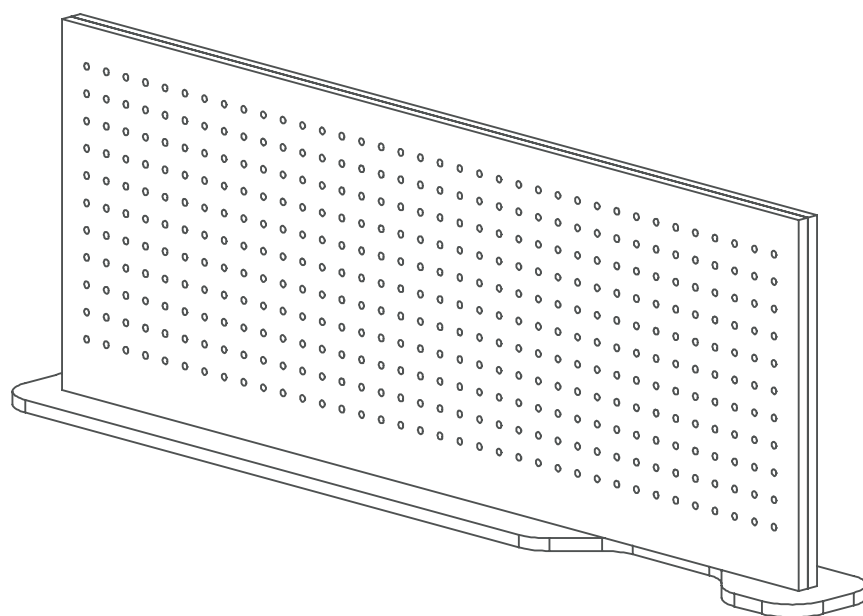

01


Dimensions

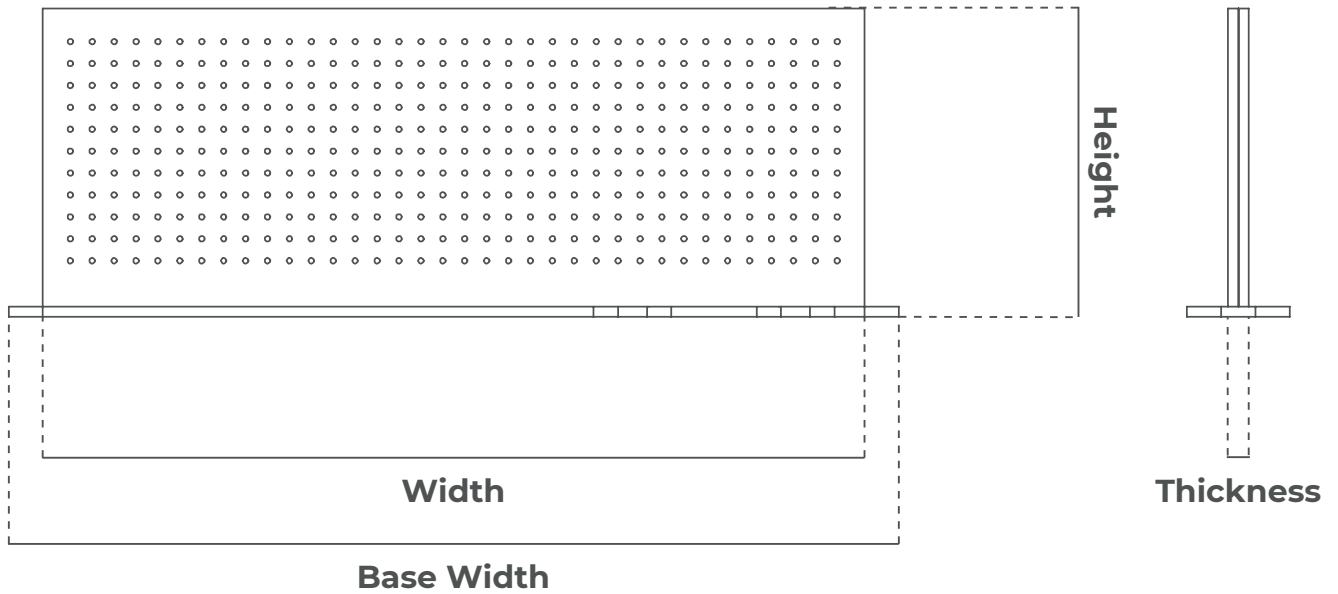

Free Standing

LATERAL

Width: 600mm Base Width: 650mm Height: 450mm Thickness: 24mm
 Width: 700mm Base Width: 750mm Height: 450mm Thickness: 24mm

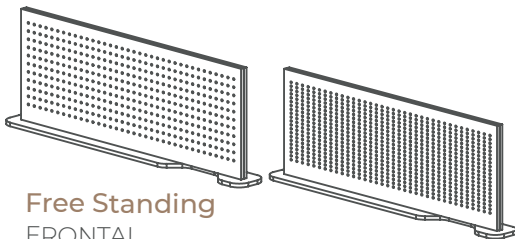

Free Standing

FRONTAL

Width: 1200mm Base Width: 1300mm Height: 450mm Thickness: 24mm
 Width: 1400mm Base Width: 1500mm Height: 450mm Thickness: 24mm
 Width: 1600mm Base Width: 1700mm Height: 450mm Thickness: 24mm
 Width: 1800mm Base Width: 1900mm Height: 450mm Thickness: 24mm


02

Finishes



Composition Painted Birch Plywood
Thickness 15 mm
FSC certified
PEFC certified
Harvested under EU timber regulations

Lacquered Finish
White




Composition Painted Birch Plywood
Thickness 15 mm
FSC certified
PEFC certified
Harvested under EU timber regulations

Lacquered Finish
Grey



Composition Laminated Birch Plywood
Thickness 15 mm
Wear Resistance ISO 4586-1/2: 350 Cycles
Stain Resistance ISO 4586-1/2: 5
Fully cleanable and disinfected
FSC certified
PEFC certified
Harvested under EU timber regulations

Laminated Finish
Beige Gaudi



Composition Laminated Birch Plywood
Thickness 15 mm
Wear Resistance ISO 4586-1/2: 350 Cycles
Stain Resistance ISO 4586-1/2: 5
Fully cleanable and disinfected
FSC certified
PEFC certified
Harvested under EU timber regulations

Laminated Finish
Grey Stone



Composition Laminated Birch Plywood
Thickness 15 mm
Wear Resistance ISO 4586-1/2: 350 Cycles
Stain Resistance ISO 4586-1/2: 5
Fully cleanable and disinfectable
FSC certified
PEFC certified
Harvested under EU timber regulations

Laminated Finish
Lino Blanco



Composition Laminated Birch Plywood
Thickness 15 mm
Wear Resistance ISO 4586-1/2: 350 Cycles
Stain Resistance ISO 4586-1/2: 5
Fully cleanable and disinfectable
FSC certified
PEFC certified
Harvested under EU timber regulations

Laminated Finish
Lino Gris




Thickness 8 mm
Transparency Clear

Acrylic
Clear




Technical File

Keen Line - Free Standing | Acrylic Guard

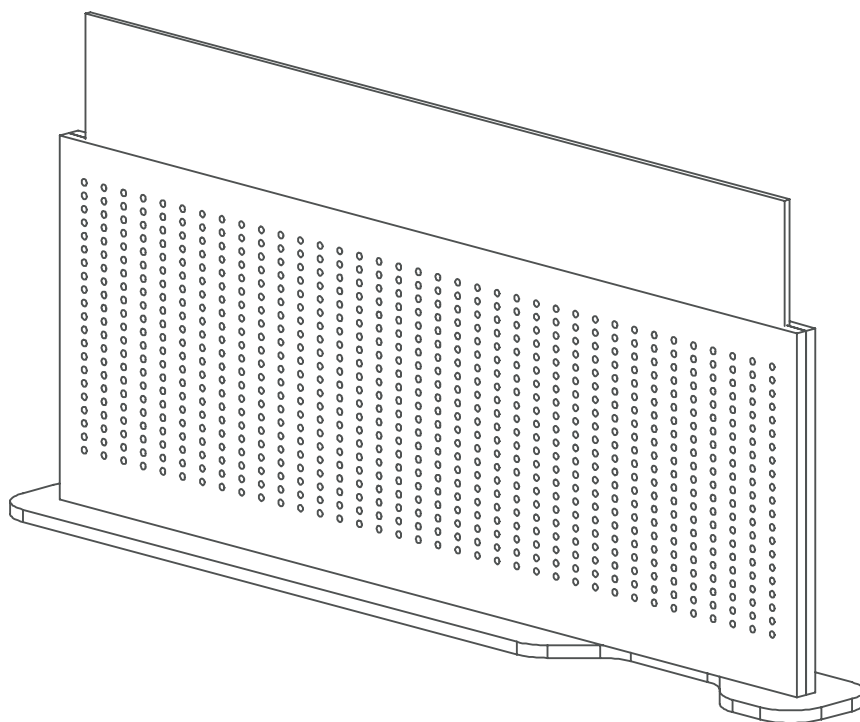

01


Dimensions

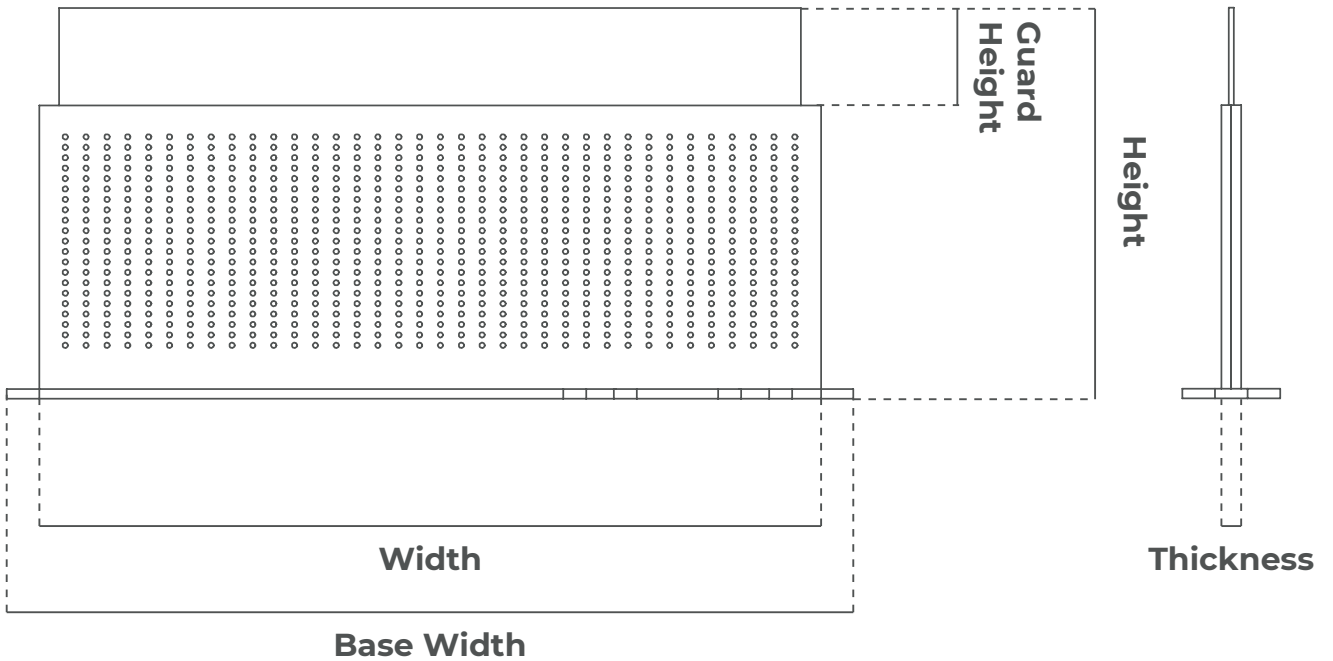

Free Standig | Acrylic Guard

LATERAL

Width: 600mm	Base Width: 650mm	Height: 600mm	Guard Height: 150mm	Thickness: 24mm
Width: 700mm	Base Width: 750mm	Height: 600mm	Guard Height: 150mm	Thickness: 24mm



Free Standing | Acrylic Guard

FRONTAL

Width: 1200mm	Base Width: 1300mm	Height: 600mm	Guard Height: 150mm	Thickness: 24mm
Width: 1400mm	Base Width: 1500mm	Height: 600mm	Guard Height: 150mm	Thickness: 24mm
Width: 1600mm	Base Width: 1700mm	Height: 600mm	Guard Height: 150mm	Thickness: 24mm
Width: 1800mm	Base Width: 1900mm	Height: 600mm	Guard Height: 150mm	Thickness: 24mm


02

Finishes



Composition Painted Birch Plywood
Thickness 15 mm
FSC certified
PEFC certified
Harvested under EU timber regulations

Lacquered Finish
White




Composition Painted Birch Plywood
Thickness 15 mm
FSC certified
PEFC certified
Harvested under EU timber regulations

Lacquered Finish
Grey



Composition Laminated Birch Plywood
Thickness 15 mm
Wear Resistance ISO 4586-1/2: 350 Cycles
Stain Resistance ISO 4586-1/2: 5
Fully cleanable and disinfected
FSC certified
PEFC certified
Harvested under EU timber regulations

Laminated Finish
Beige Gaudi



Composition Laminated Birch Plywood
Thickness 15 mm
Wear Resistance ISO 4586-1/2: 350 Cycles
Stain Resistance ISO 4586-1/2: 5
Fully cleanable and disinfected
FSC certified
PEFC certified
Harvested under EU timber regulations

Laminated Finish
Grey Stone



Composition Laminated Birch Plywood
Thickness 15 mm
Wear Resistance ISO 4586-1/2: 350 Cycles
Stain Resistance ISO 4586-1/2: 5
Fully cleanable and disinfectable
FSC certified
PEFC certified
Harvested under EU timber regulations

Laminated Finish

Lino Blanco



Composition Laminated Birch Plywood
Thickness 15 mm
Wear Resistance ISO 4586-1/2: 350 Cycles
Stain Resistance ISO 4586-1/2: 5
Fully cleanable and disinfectable
FSC certified
PEFC certified
Harvested under EU timber regulations

Laminated Finish

Lino Gris




Thickness 8 mm
Transparency Clear

Acrylic

Clear




Technical File

Keen Line - Floor Screen

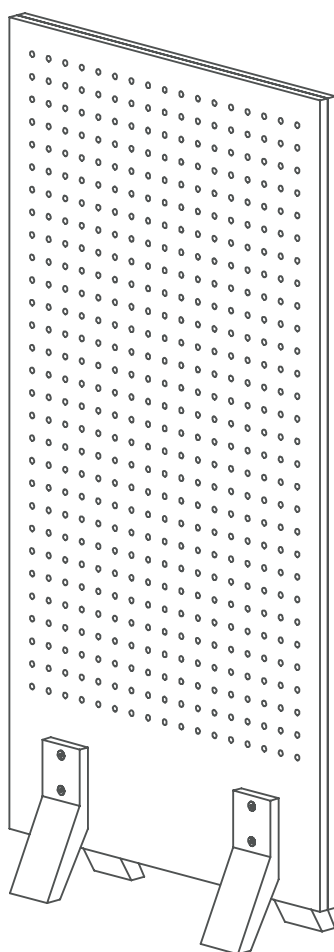

01

Dimensions

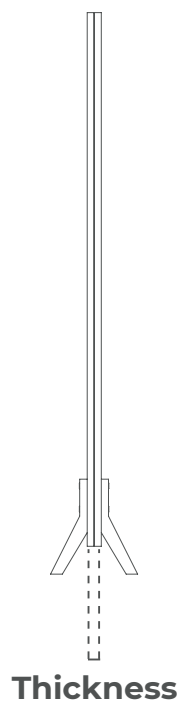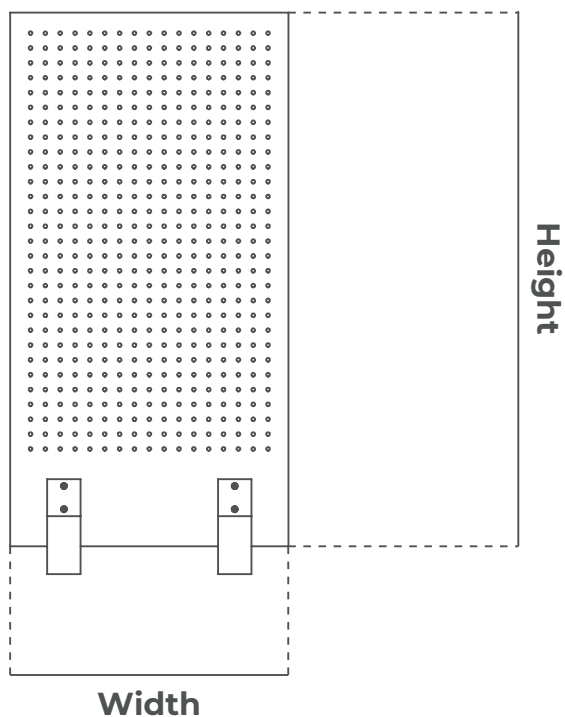

Floor Screen

Width: 600mm	Height: 1200mm	Thickness: 24mm
Width: 600mm	Height: 1500mm	Thickness: 24mm
Width: 800mm	Height: 1200mm	Thickness: 24mm
Width: 800mm	Height: 1500mm	Thickness: 24mm


02

Finishes



Composition Painted Birch Plywood
Thickness 15 mm
FSC certified
PEFC certified
Harvested under EU timber regulations

Lacquered Finish
White




Composition Painted Birch Plywood
Thickness 15 mm
FSC certified
PEFC certified
Harvested under EU timber regulations

Lacquered Finish
Grey



Composition Laminated Birch Plywood
Thickness 15 mm
Wear Resistance ISO 4586-1/2: 350 Cycles
Stain Resistance ISO 4586-1/2: 5
Fully cleanable and disinfected
FSC certified
PEFC certified
Harvested under EU timber regulations

Laminated Finish
Beige Gaudi



Composition Laminated Birch Plywood
Thickness 15 mm
Wear Resistance ISO 4586-1/2: 350 Cycles
Stain Resistance ISO 4586-1/2: 5
Fully cleanable and disinfected
FSC certified
PEFC certified
Harvested under EU timber regulations

Laminated Finish
Grey Stone



Composition Laminated Birch Plywood
Thickness 15 mm
Wear Resistance ISO 4586-1/2: 350 Cycles
Stain Resistance ISO 4586-1/2: 5
Fully cleanable and disinfectable
FSC certified
PEFC certified
Harvested under EU timber regulations

Laminated Finish
Lino Blanco



Composition Laminated Birch Plywood
Thickness 15 mm
Wear Resistance ISO 4586-1/2: 350 Cycles
Stain Resistance ISO 4586-1/2: 5
Fully cleanable and disinfectable
FSC certified
PEFC certified
Harvested under EU timber regulations

Laminated Finish
Lino Gris




Thickness 8 mm
Transparency Clear

Acrylic
Clear



Technical File

Keen Line - Floor Screen | Acrylic Guard

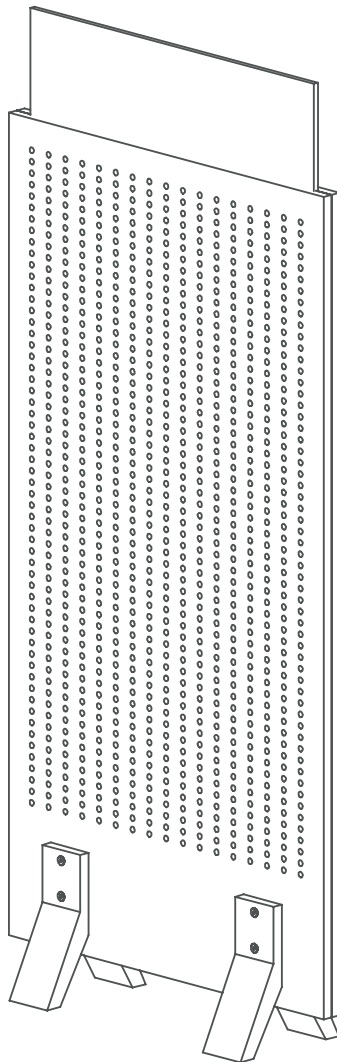

01

Dimensions

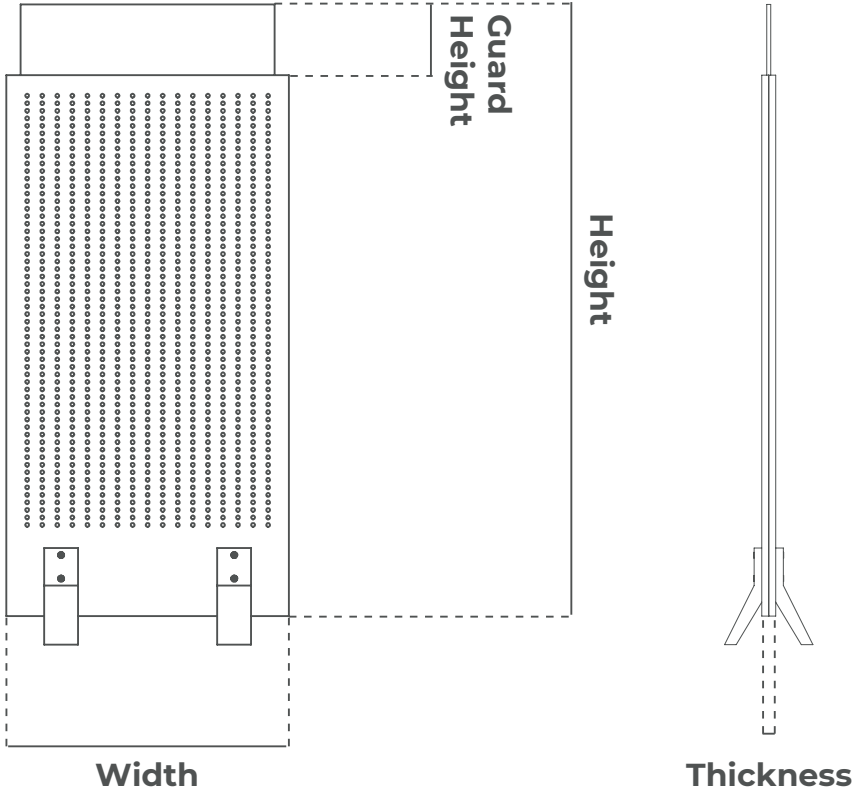

Floor Screen | Acrylic Guard

Width: 600mm	Height: 1350mm	Acrylic Guard Height: 150mm	Thickness: 24mm
Width: 600mm	Height: 1650mm	Acrylic Guard Height: 150mm	Thickness: 24mm
Width: 800mm	Height: 1350mm	Acrylic Guard Height: 150mm	Thickness: 24mm
Width: 800mm	Height: 1650mm	Acrylic Guard Height: 150mm	Thickness: 24mm


02

Finishes



Composition Painted Birch Plywood
Thickness 15 mm
FSC certified
PEFC certified
Harvested under EU timber regulations

Lacquered Finish
White




Composition Painted Birch Plywood
Thickness 15 mm
FSC certified
PEFC certified
Harvested under EU timber regulations

Lacquered Finish
Grey



Composition Laminated Birch Plywood
Thickness 15 mm
Wear Resistance ISO 4586-1/2: 350 Cycles
Stain Resistance ISO 4586-1/2: 5
Fully cleanable and disinfected
FSC certified
PEFC certified
Harvested under EU timber regulations

Laminated Finish
Beige Gaudi



Composition Laminated Birch Plywood
Thickness 15 mm
Wear Resistance ISO 4586-1/2: 350 Cycles
Stain Resistance ISO 4586-1/2: 5
Fully cleanable and disinfected
FSC certified
PEFC certified
Harvested under EU timber regulations

Laminated Finish
Grey Stone



Composition Laminated Birch Plywood
Thickness 15 mm
Wear Resistance ISO 4586-1/2: 350 Cycles
Stain Resistance ISO 4586-1/2: 5
Fully cleanable and disinfectable
FSC certified
PEFC certified
Harvested under EU timber regulations

Laminated Finish

Lino Blanco



Composition Laminated Birch Plywood
Thickness 15 mm
Wear Resistance ISO 4586-1/2: 350 Cycles
Stain Resistance ISO 4586-1/2: 5
Fully cleanable and disinfectable
FSC certified
PEFC certified
Harvested under EU timber regulations

Laminated Finish

Lino Gris



Thickness 8 mm
Transparency Clear

Acrylic

Clear