




Technical File

Klever Line - Desk Fix

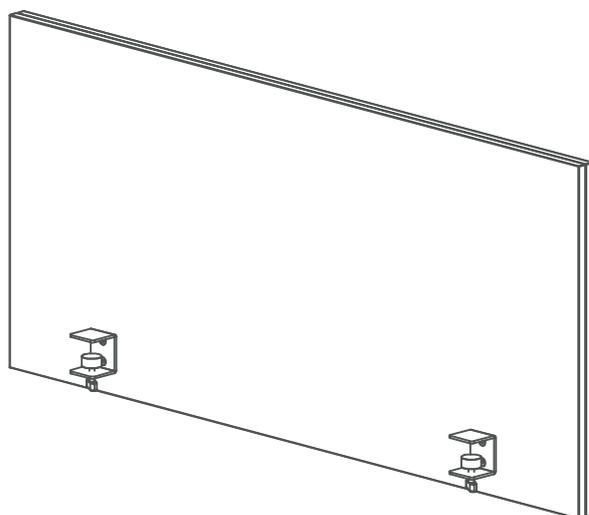

01

Dimensions

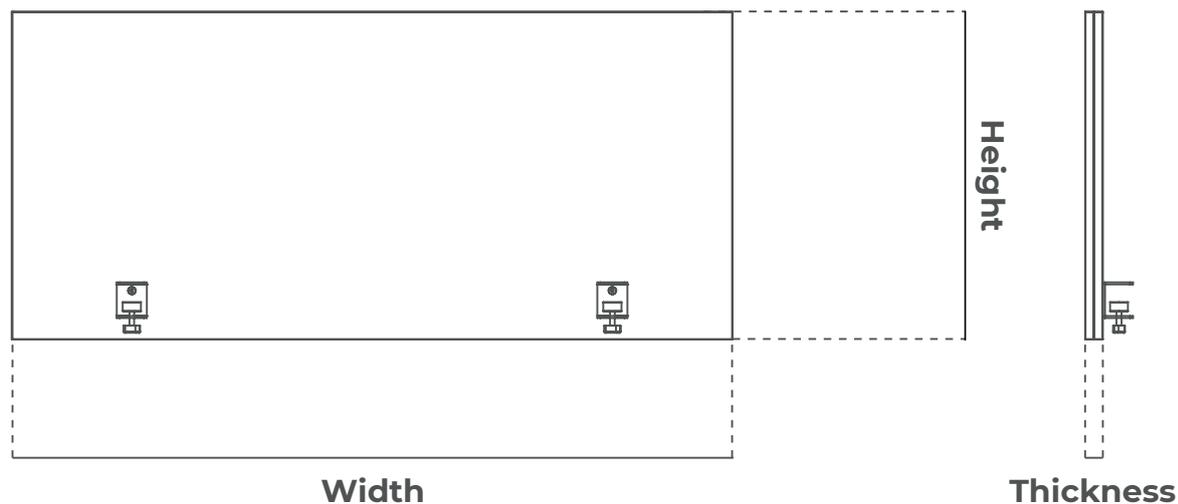


Desk Fix

LATERAL

Width: 600mm Height: 550mm Thickness: 28mm

Width: 700mm Height: 550mm Thickness: 28mm



Desk Fix


FRONTAL

Width: 1200mm Height: 550mm Thickness: 28mm

Width: 1400mm Height: 550mm Thickness: 28mm

Width: 1600mm Height: 550mm Thickness: 28mm

Width: 1800mm Height: 550mm Thickness: 28mm

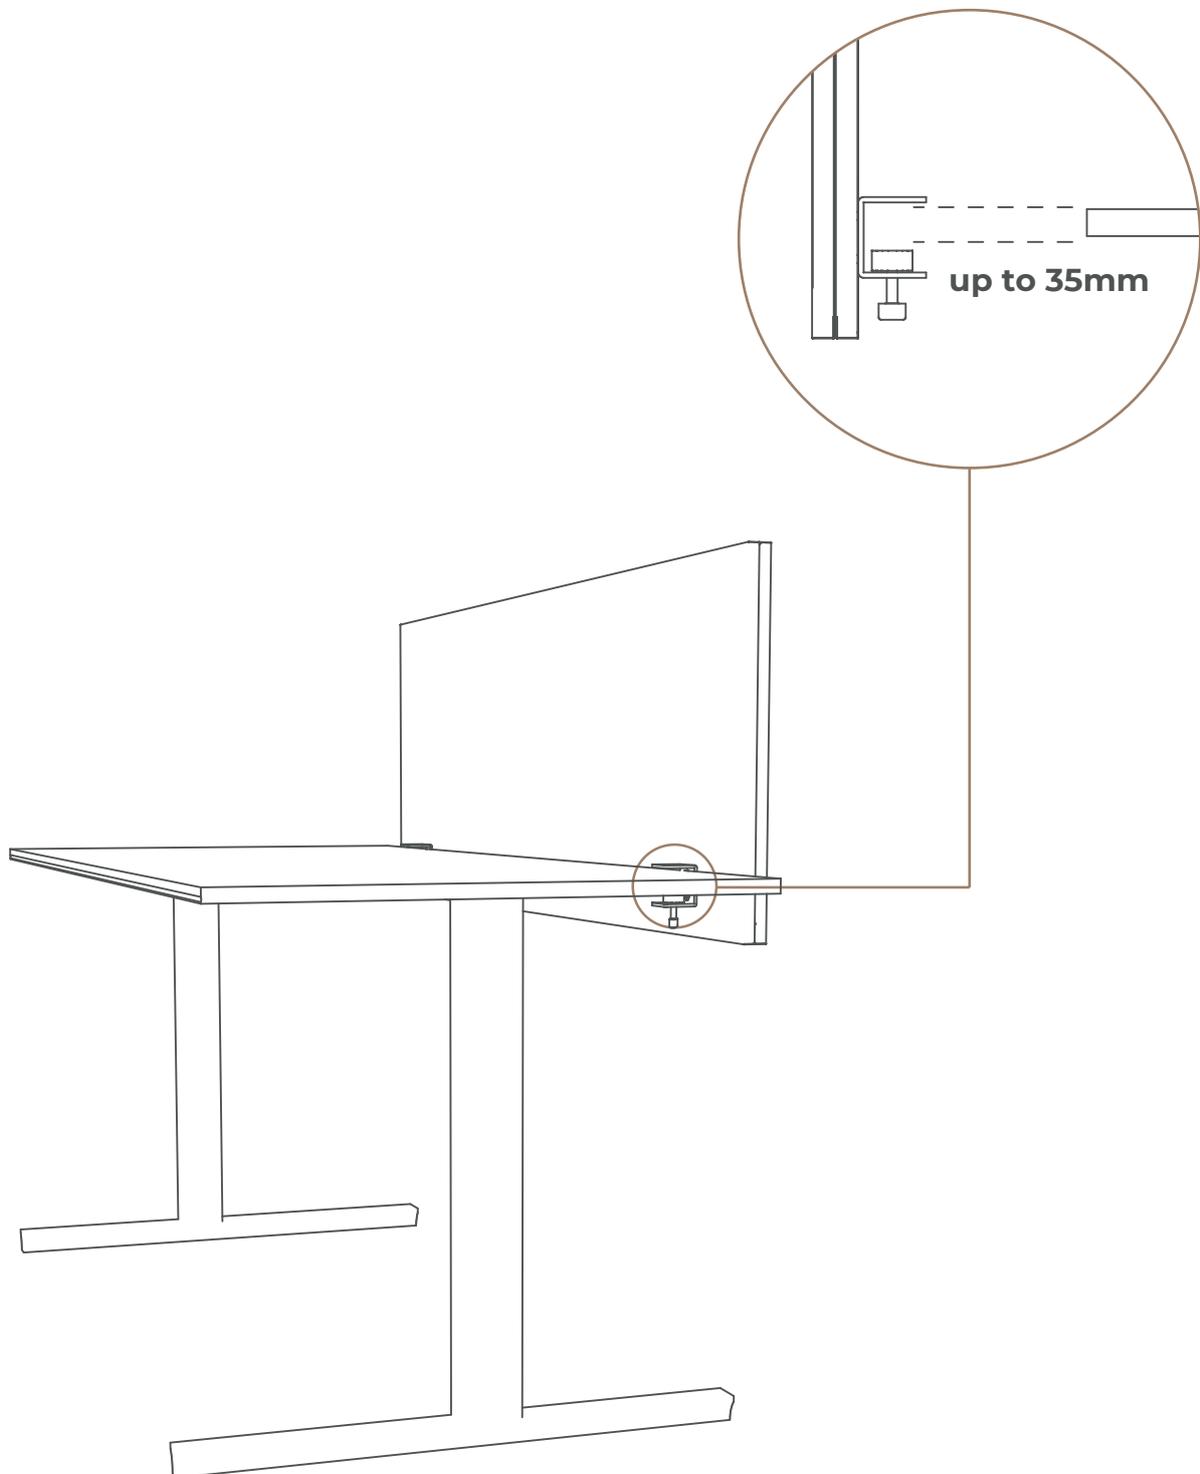

02

Finishes



Composition 100% Polyester
Colour Fastness to light DIN 54004
Flame Retardancy DIN 4102 B2
Abrasion resistance 300.000 cycles
Antibacterial, Antifungal and Antimycotic Protection
Anti-Stain finish
Anti-static finish

Faux Leather Finish
Auster



Composition 100% Polyester
Colour Fastness to light
Flame Retardancy
Abrasion resistance
Antibacterial, Antifungal and Antimycotic Protection
Anti-Stain finish
Anti-static finish

Faux Leather Finish
Leinen




Composition 100% Polyester
Colour Fastness to light
Flame Retardancy DIN 4102 B2
Abrasion resistance 300.000 cycles
Antibacterial, Antifungal and Antimycotic Protection
Anti-Stain finish
Anti-static finish

Faux Leather Finish
Pure White



Composition 100% Polyester
Colour Fastness to light
Flame Retardancy
Abrasion resistance
Antibacterial, Antifungal and Antimycotic Protection
Anti-Stain finish
Anti-static finish

Faux Leather Finish
Taupe



Woven Fabric Finish Glass

Composition 100% Polypropylene

Weight 220 g/m²

Flammability EN 1021-1 (cigarette) // BS 476 Part 7 Class 1 (Adhered)
EN 13501-1 (SBI) Adhered Class B, s2, d0

Light Fastness 6 (ISO 105 - B02)

Fastness to Rubbing Wet: 4, Dry: 4 (ISO 105 - X12)

Certified to the EU Ecolabel

Certified to Indoor Advantage™ Gold

Cleaning Vacuum regularly, wipe with a damp cloth using a proprietary upholstery shampoo/soap. For deeper cleaning, use bleach or alcohol.

Bleach Cleanable ISO 105 E03 colour change 4 for dilution factor 1:4 chlorine solution



Woven Fabric Finish Easdale

Composition 100% Polypropylene

Weight 220 g/m²

Flammability EN 1021-1 (cigarette) // BS 476 Part 7 Class 1 (Adhered)
EN 13501-1 (SBI) Adhered Class B, s2, d0

Light Fastness 6 (ISO 105 - B02)


Fastness to Rubbing Wet: 4, Dry: 4 (ISO 105 - X12)

Certified to the EU Ecolabel

Certified to Indoor Advantage™ Gold

Cleaning Vacuum regularly, wipe with a damp cloth using a proprietary upholstery shampoo/soap. For deeper cleaning, use bleach or alcohol.

Bleach Cleanable ISO 105 E03 colour change 4 for dilution factor 1:4 chlorine solution



Woven Fabric Finish

Lead

Composition 100% Polypropylene

Weight 220 g/m²

Flammability EN 1021-1 (cigarette) // BS 476 Part 7 Class 1 (Adhered)
EN 13501-1 (SBI) Adhered Class B, s2, d0

Light Fastness 6 (ISO 105 - B02)

Fastness to Rubbing Wet: 4, Dry: 4 (ISO 105 - X12)

Certified to the EU Ecolabel

Certified to Indoor Advantage™ Gold

Cleaning Vacuum regularly, wipe with a damp cloth using a proprietary upholstery shampoo/soap. For deeper cleaning, use bleach or alcohol.

Bleach Cleanable ISO 105 E03 colour change 4 for dilution factor 1:4 chlorine solution



Woven Fabric Finish

Beltane

Composition 100% Polypropylene

Weight 220 g/m²

Flammability EN 1021-1 (cigarette) // BS 476 Part 7 Class 1 (Adhered)
EN 13501-1 (SBI) Adhered Class B, s2, d0

Light Fastness 6 (ISO 105 - B02)

Fastness to Rubbing Wet: 4, Dry: 4 (ISO 105 - X12)

Certified to the EU Ecolabel


Certified to Indoor Advantage™ Gold

Cleaning Vacuum regularly, wipe with a damp cloth using a proprietary upholstery shampoo/soap. For deeper cleaning, use bleach or alcohol.

Bleach Cleanable ISO 105 E03 colour change 4 for dilution factor 1:4 chlorine solution


Technical File

Klever Line - Desk Fix | Acrylic Guard

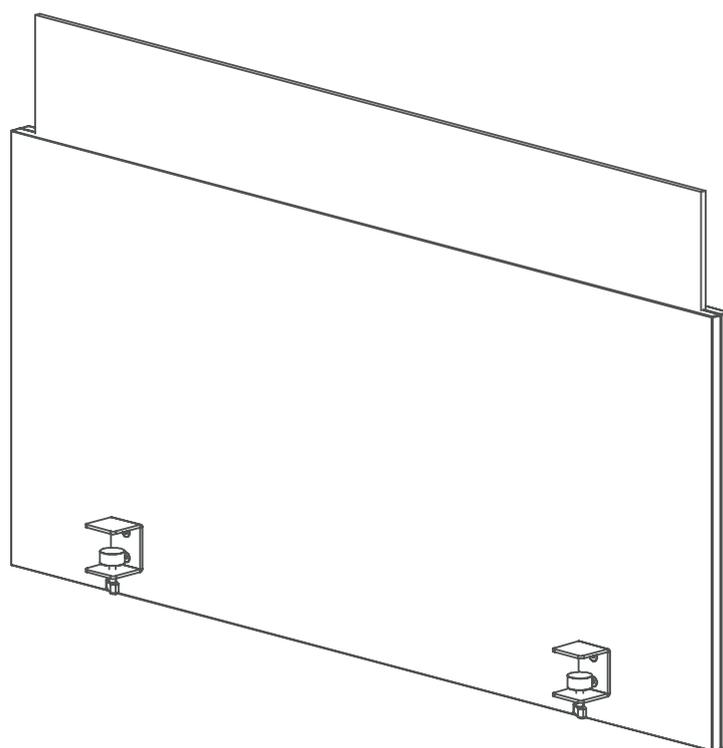

01


Dimensions

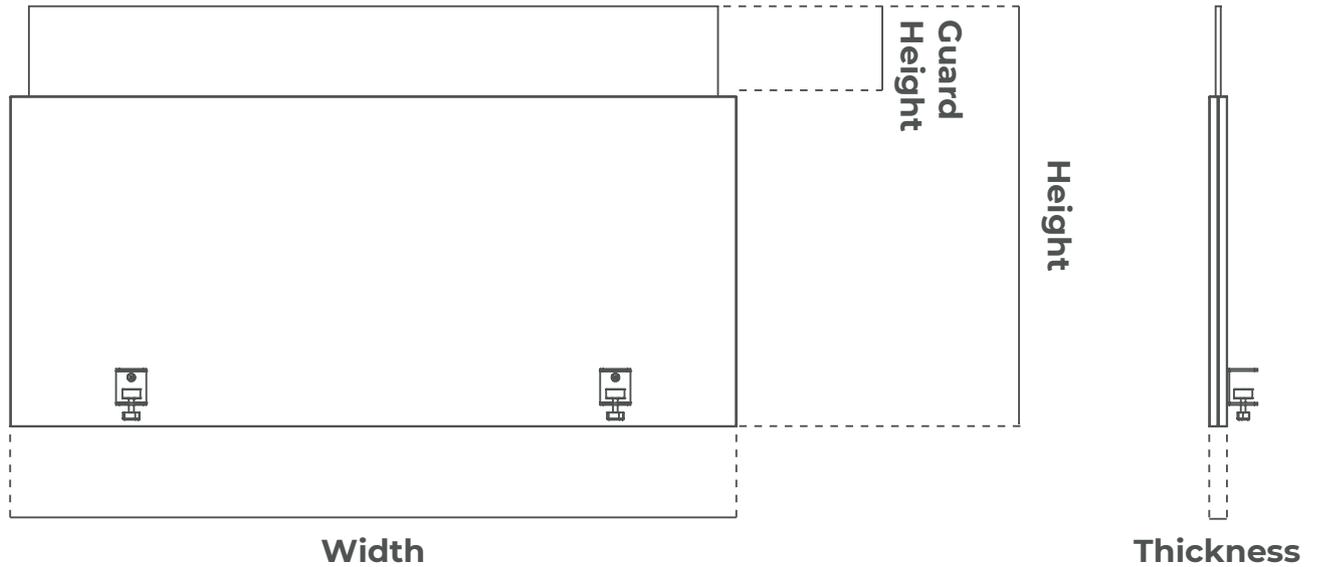

Desk Fix | Acrylic Guard

LATERAL


Width: 600mm Height: 700mm Acrylic Guard Height: 150mm Thickness: 28mm
 Width: 700mm Height: 700mm Acrylic Guard Height: 150mm Thickness: 28mm



Desk Fix / Acrylic Guard

FRONTAL

Width: 1200mm Height: 700mm Acrylic Guard Height: 150mm Thickness: 28mm
 Width: 1400mm Height: 700mm Acrylic Guard Height: 150mm Thickness: 28mm
 Width: 1600mm Height: 700mm Acrylic Guard Height: 150mm Thickness: 28mm
 Width: 1800mm Height: 700mm Acrylic Guard Height: 150mm Thickness: 28mm

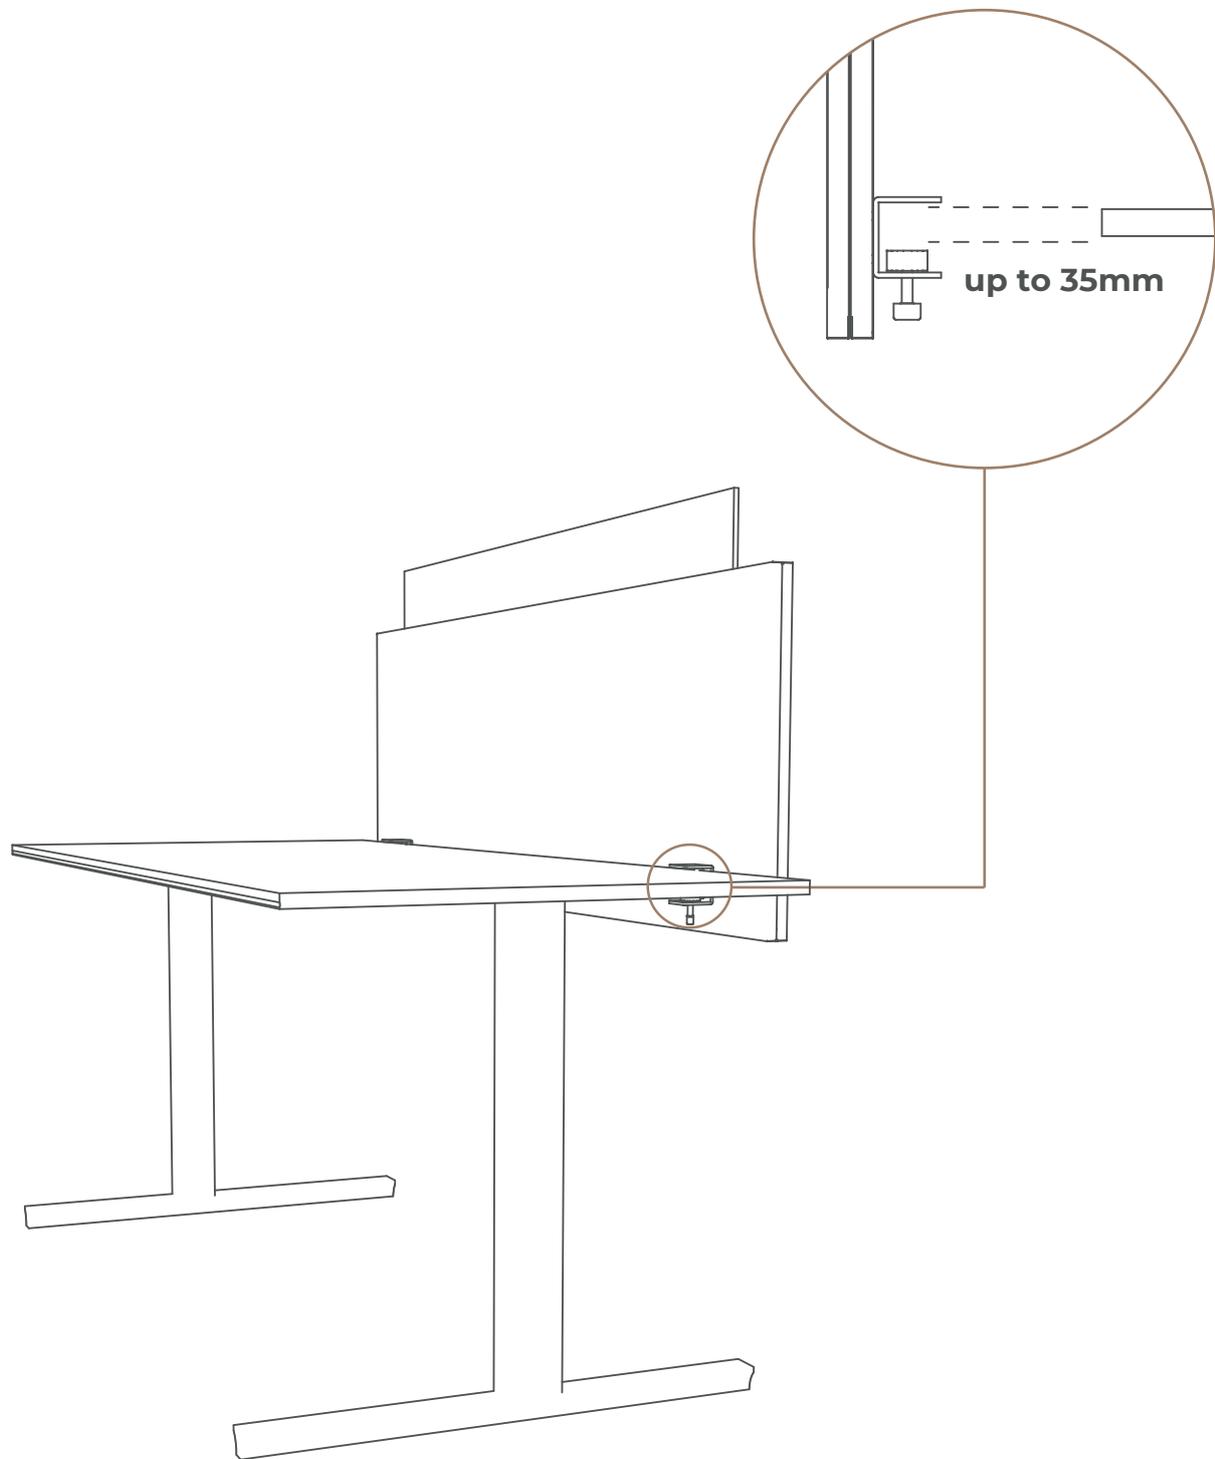

02

Finishes



Composition 100% Polyester
Colour Fastness to light DIN 54004
Flame Retardancy DIN 4102 B2
Abrasion resistance 300.000 cycles
Antibacterial, Antifungal and Antimycotic Protection
Anti-Stain finish
Anti-static finish

Faux Leather Finish
Auster



Composition 100% Polyester
Colour Fastness to light
Flame Retardancy
Abrasion resistance
Antibacterial, Antifungal and Antimycotic Protection
Anti-Stain finish
Anti-static finish

Faux Leather Finish
Leinen




Composition 100% Polyester
Colour Fastness to light
Flame Retardancy DIN 4102 B2
Abrasion resistance 300.000 cycles
Antibacterial, Antifungal and Antimycotic Protection
Anti-Stain finish
Anti-static finish

Faux Leather Finish
Pure White



Composition 100% Polyester
Colour Fastness to light
Flame Retardancy
Abrasion resistance
Antibacterial, Antifungal and Antimycotic Protection
Anti-Stain finish
Anti-static finish

Faux Leather Finish
Taupe




Woven Fabric Finish Glass

Composition 100% Polypropylene
Weight 220 g/m²
Flammability EN 1021-1 (cigarette) // BS 476 Part 7 Class 1 (Adhered)
EN 13501-1 (SBI) Adhered Class B, s2, d0
Light Fastness 6 (ISO 105 - B02)
Fastness to Rubbing Wet: 4, Dry: 4 (ISO 105 - X12)
Certified to the EU Ecolabel
Certified to Indoor Advantage™ Gold
Cleaning Vacuum regularly, wipe with a damp cloth using a proprietary upholstery shampoo/soap. For deeper cleaning, use bleach or alcohol.
Bleach Cleanable ISO 105 E03 colour change 4 for dilution factor 1:4 chlorine solution



Woven Fabric Finish Easdale

Composition 100% Polypropylene
Weight 220 g/m²
Flammability EN 1021-1 (cigarette) // BS 476 Part 7 Class 1 (Adhered)
EN 13501-1 (SBI) Adhered Class B, s2, d0
Light Fastness 6 (ISO 105 - B02)
Fastness to Rubbing Wet: 4, Dry: 4 (ISO 105 - X12)
Certified to the EU Ecolabel
Certified to Indoor Advantage™ Gold
Cleaning Vacuum regularly, wipe with a damp cloth using a proprietary upholstery shampoo/soap. For deeper cleaning, use bleach or alcohol.
Bleach Cleanable ISO 105 E03 colour change 4 for dilution factor 1:4 chlorine solution



Woven Fabric Finish Lead

Composition 100% Polypropylene
Weight 220 g/m²
Flammability EN 1021-1 (cigarette) // BS 476 Part 7 Class 1 (Adhered)
EN 13501-1 (SBI) Adhered Class B, s2, d0
Light Fastness 6 (ISO 105 - B02)
Fastness to Rubbing Wet: 4, Dry: 4 (ISO 105 - X12)
Certified to the EU Ecolabel
Certified to Indoor Advantage™ Gold
Cleaning Vacuum regularly, wipe with a damp cloth using a proprietary upholstery shampoo/soap. For deeper cleaning, use bleach or alcohol.
Bleach Cleanable ISO 105 E03 colour change 4 for dilution factor 1:4 chlorine solution



Woven Fabric Finish
Beltane

Composition 100% Polypropylene

Weight 220 g/m²

Flammability EN 1021-1 (cigarette) // BS 476 Part 7 Class 1 (Adhered)

EN 13501-1 (SBI) Adhered Class B, s2, d0

Light Fastness 6 (ISO 105 - B02)

Fastness to Rubbing Wet: 4, Dry: 4 (ISO 105 - X12)

Certified to the EU Ecolabel

Certified to Indoor Advantage™ Gold

Cleaning Vacuum regularly, wipe with a damp cloth using a proprietary upholstery shampoo/soap. For deeper cleaning, use bleach or alcohol.

Bleach Cleanable ISO 105 E03 colour change 4 for dilution factor 1:4 chlorine solution




Acrylic
Clear

Thickness 8 mm

Transparency Clear


Technical File

Klever Line - Free Standing

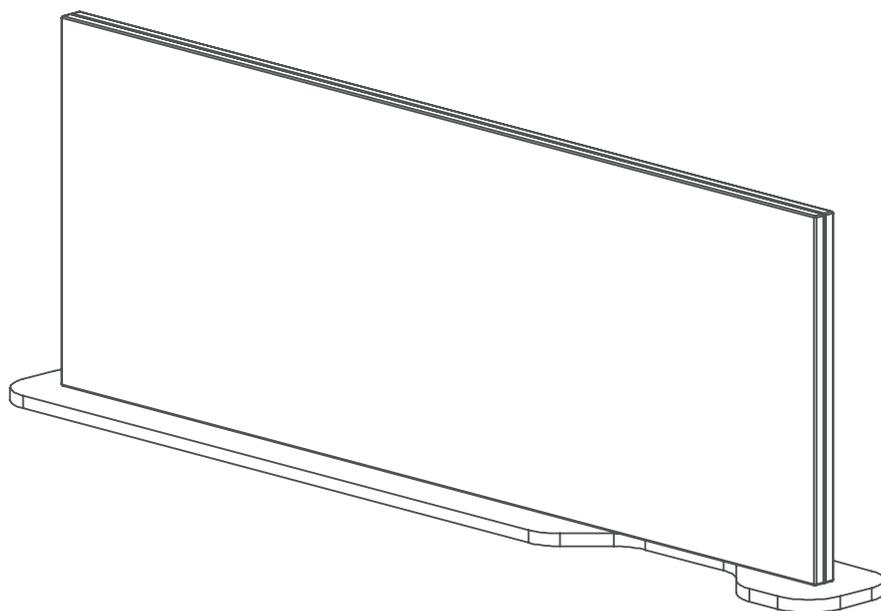

01

Dimensions

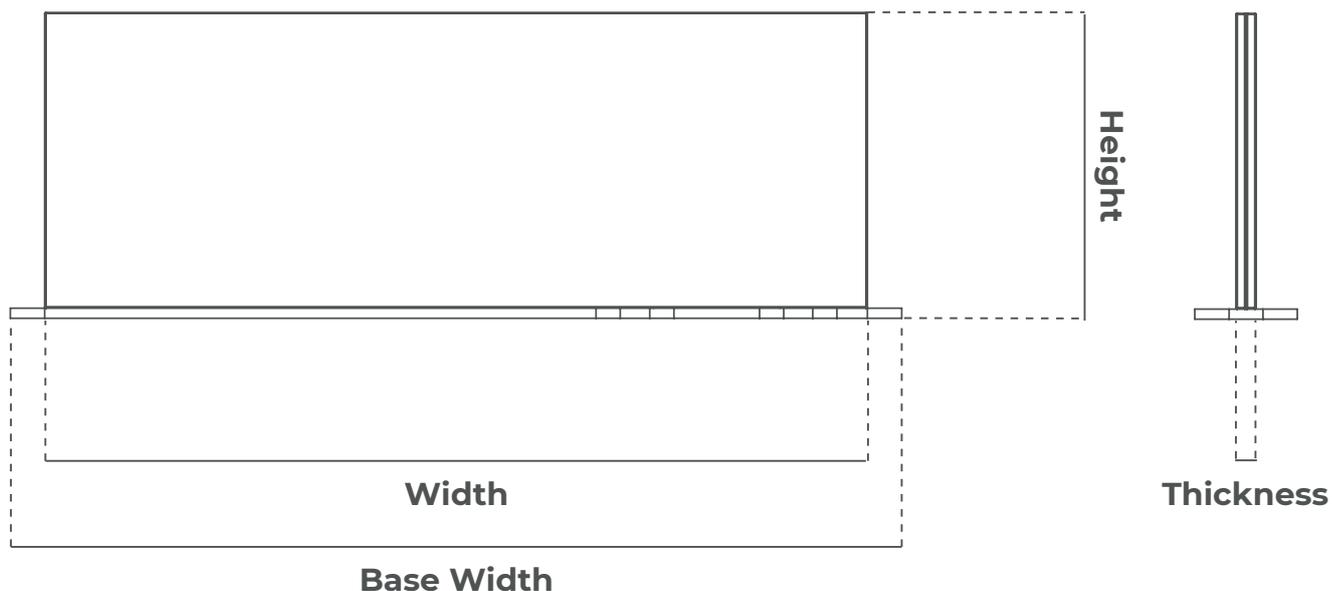

Free Standing

LATERAL

Width: 600mm Base Width: 650mm Height: 450mm Thickness: 28mm
 Width: 700mm Base Width: 750mm Height: 450mm Thickness: 28mm



Free Standing

FRONTAL

Width: 1200mm Base Width: 1300mm Height: 450mm Thickness: 28mm
 Width: 1400mm Base Width: 1500mm Height: 450mm Thickness: 28mm
 Width: 1600mm Base Width: 1700mm Height: 450mm Thickness: 28mm
 Width: 1800mm Base Width: 1900mm Height: 450mm Thickness: 28mm

02

Finishes



Composition 100% Polyester
Colour Fastness to light DIN 54004
Flame Retardancy DIN 4102 B2
Abrasion resistance 300.000 cycles
Antibacterial, Antifungal and Antimycotic Protection
Anti-Stain finish
Anti-static finish

Faux Leather Finish
Auster



Composition 100% Polyester
Colour Fastness to light
Flame Retardancy
Abrasion resistance
Antibacterial, Antifungal and Antimycotic Protection
Anti-Stain finish
Anti-static finish

Faux Leather Finish
Leinen




Composition 100% Polyester
Colour Fastness to light
Flame Retardancy DIN 4102 B2
Abrasion resistance 300.000 cycles
Antibacterial, Antifungal and Antimycotic Protection
Anti-Stain finish
Anti-static finish

Faux Leather Finish
Pure White



Composition 100% Polyester
Colour Fastness to light
Flame Retardancy
Abrasion resistance
Antibacterial, Antifungal and Antimycotic Protection
Anti-Stain finish
Anti-static finish

Faux Leather Finish
Taupe



Woven Fabric Finish
Glass

Composition 100% Polypropylene

Weight 220 g/m²

Flammability EN 1021-1 (cigarette) // BS 476 Part 7 Class 1 (Adhered)
EN 13501-1 (SBI) Adhered Class B, s2, d0

Light Fastness 6 (ISO 105 - B02)

Fastness to Rubbing Wet: 4, Dry: 4 (ISO 105 - X12)

Certified to the EU Ecolabel

Certified to Indoor Advantage™ Gold

Cleaning Vacuum regularly, wipe with a damp cloth using a proprietary upholstery shampoo/soap. For deeper cleaning, use bleach or alcohol.

Bleach Cleanable ISO 105 E03 colour change 4 for dilution factor 1:4 chlorine solution



Woven Fabric Finish
Easdale

Composition 100% Polypropylene

Weight 220 g/m²

Flammability EN 1021-1 (cigarette) // BS 476 Part 7 Class 1 (Adhered)
EN 13501-1 (SBI) Adhered Class B, s2, d0

Light Fastness 6 (ISO 105 - B02)


Fastness to Rubbing Wet: 4, Dry: 4 (ISO 105 - X12)

Certified to the EU Ecolabel

Certified to Indoor Advantage™ Gold

Cleaning Vacuum regularly, wipe with a damp cloth using a proprietary upholstery shampoo/soap. For deeper cleaning, use bleach or alcohol.

Bleach Cleanable ISO 105 E03 colour change 4 for dilution factor 1:4 chlorine solution



Woven Fabric Finish

Lead

Composition 100% Polypropylene

Weight 220 g/m²

Flammability EN 1021-1 (cigarette) // BS 476 Part 7 Class 1 (Adhered)
EN 13501-1 (SBI) Adhered Class B, s2, d0

Light Fastness 6 (ISO 105 - B02)


Fastness to Rubbing Wet: 4, Dry: 4 (ISO 105 - X12)

Certified to the EU Ecolabel

Certified to Indoor Advantage™ Gold

Cleaning Vacuum regularly, wipe with a damp cloth using a proprietary upholstery shampoo/soap. For deeper cleaning, use bleach or alcohol.

Bleach Cleanable ISO 105 E03 colour change 4 for dilution factor 1:4 chlorine solution



Woven Fabric Finish

Beltane

Composition 100% Polypropylene

Weight 220 g/m²

Flammability EN 1021-1 (cigarette) // BS 476 Part 7 Class 1 (Adhered)
EN 13501-1 (SBI) Adhered Class B, s2, d0

Light Fastness 6 (ISO 105 - B02)

Fastness to Rubbing Wet: 4, Dry: 4 (ISO 105 - X12)

Certified to the EU Ecolabel


Certified to Indoor Advantage™ Gold

Cleaning Vacuum regularly, wipe with a damp cloth using a proprietary upholstery shampoo/soap. For deeper cleaning, use bleach or alcohol.

Bleach Cleanable ISO 105 E03 colour change 4 for dilution factor 1:4 chlorine solution



Technical File

Keen Line - Floor Screen | Acrylic Guard

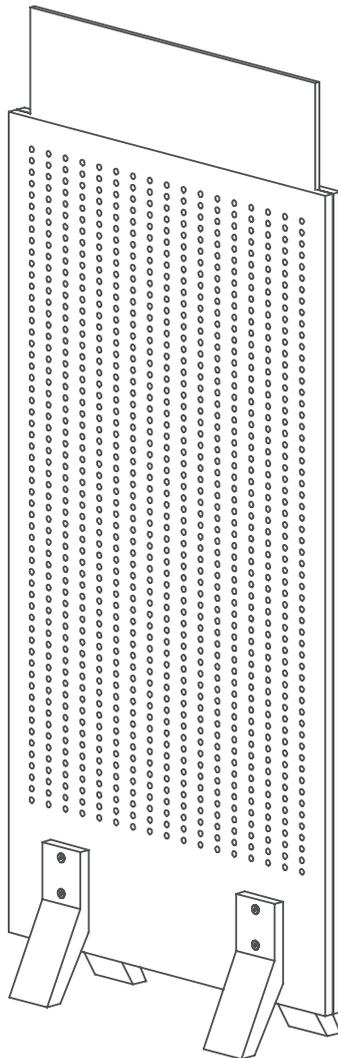

01

Dimensions

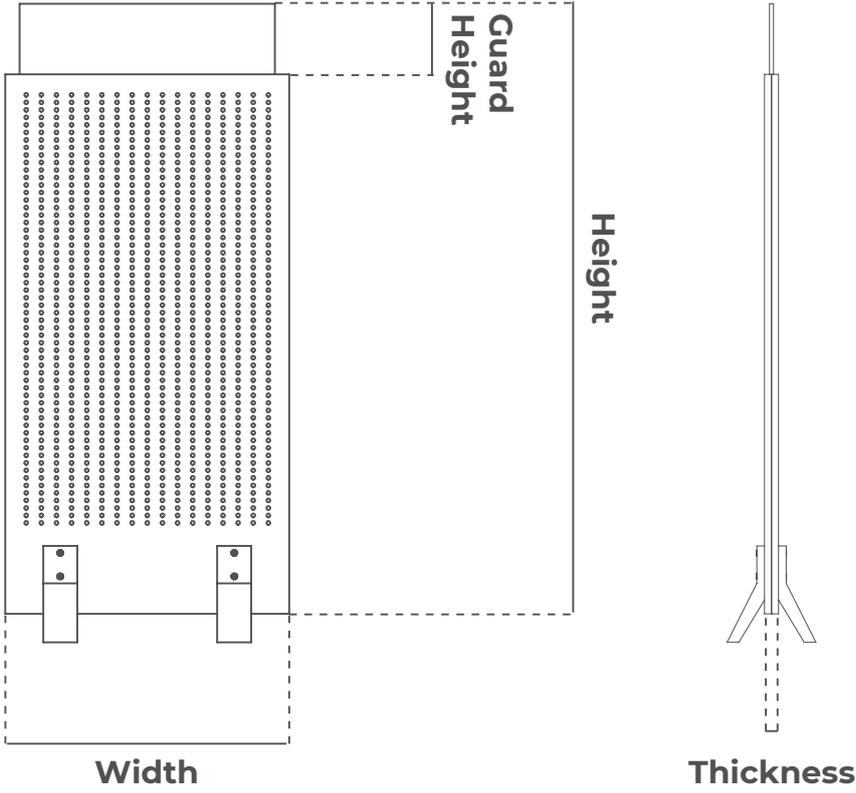

Floor Screen | Acrylic Guard

Width: 600mm	Height: 1350mm	Acrylic Guard Height: 150mm	Thickness: 24mm
Width: 600mm	Height: 1650mm	Acrylic Guard Height: 150mm	Thickness: 24mm
Width: 800mm	Height: 1350mm	Acrylic Guard Height: 150mm	Thickness: 24mm
Width: 800mm	Height: 1650mm	Acrylic Guard Height: 150mm	Thickness: 24mm


02

Finishes



Composition Painted Birch Plywood
Thickness 15 mm
FSC certified
PEFC certified
Harvested under EU timber regulations

Lacquered Finish
White




Composition Painted Birch Plywood
Thickness 15 mm
FSC certified
PEFC certified
Harvested under EU timber regulations

Lacquered Finish
Grey



Composition Laminated Birch Plywood
Thickness 15 mm
Wear Resistance ISO 4586-1/2: 350 Cycles
Stain Resistance ISO 4586-1/2: 5
Fully cleanable and disinfected
FSC certified
PEFC certified
Harvested under EU timber regulations

Laminated Finish
Beige Gaudi




Composition Laminated Birch Plywood
Thickness 15 mm
Wear Resistance ISO 4586-1/2: 350 Cycles
Stain Resistance ISO 4586-1/2: 5
Fully cleanable and disinfected
FSC certified
PEFC certified
Harvested under EU timber regulations

Laminated Finish
Grey Stone



Composition Laminated Birch Plywood
Thickness 15 mm
Wear Resistance ISO 4586-1/2: 350 Cycles
Stain Resistance ISO 4586-1/2: 5
Fully cleanable and disinfected
FSC certified
PEFC certified
Harvested under EU timber regulations

Laminated Finish
Lino Blanco



Composition Laminated Birch Plywood
Thickness 15 mm
Wear Resistance ISO 4586-1/2: 350 Cycles
Stain Resistance ISO 4586-1/2: 5
Fully cleanable and disinfected
FSC certified
PEFC certified
Harvested under EU timber regulations

Laminated Finish
Lino Gris




Thickness 8 mm
Transparency Clear

Acrylic
Clear



Technical File

Klever Line - Floor Screen

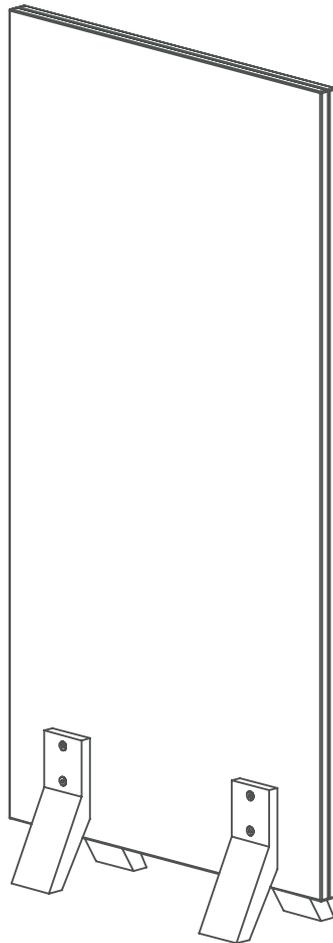

01

Dimensions

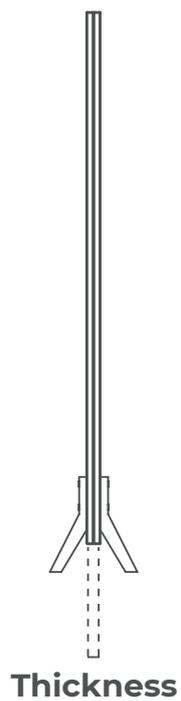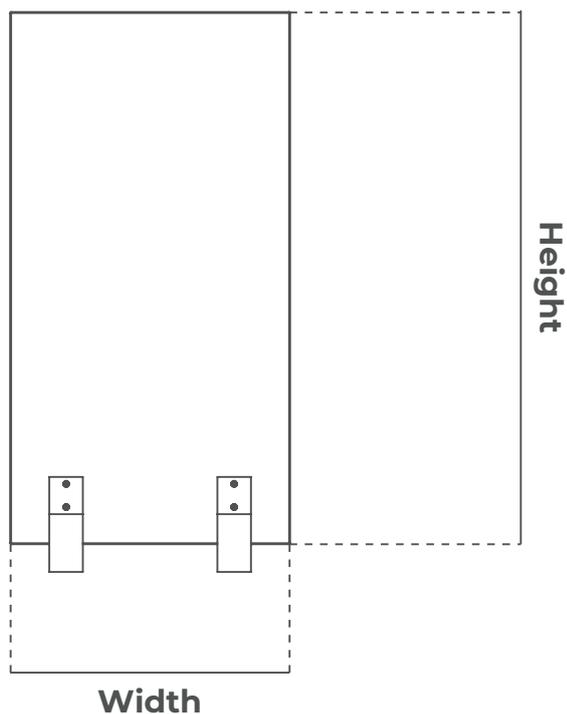

Floor Screen

Width: 600mm	Height: 1200mm	Thickness: 28mm
Width: 600mm	Height: 1500mm	Thickness: 28mm
Width: 800mm	Height: 1200mm	Thickness: 28mm
Width: 800mm	Height: 1500mm	Thickness: 28mm

02

Finishes



Composition 100% Polyester
Colour Fastness to light DIN 54004
Flame Retardancy DIN 4102 B2
Abrasion resistance 300.000 cycles
Antibacterial, Antifungal and Antimycotic Protection
Anti-Stain finish
Anti-static finish

Faux Leather Finish
Auster



Composition 100% Polyester
Colour Fastness to light
Flame Retardancy
Abrasion resistance
Antibacterial, Antifungal and Antimycotic Protection
Anti-Stain finish
Anti-static finish

Faux Leather Finish
Leinen



Composition 100% Polyester
Colour Fastness to light
Flame Retardancy DIN 4102 B2
Abrasion resistance 300.000 cycles
Antibacterial, Antifungal and Antimycotic Protection
Anti-Stain finish
Anti-static finish

Faux Leather Finish
Pure White



Composition 100% Polyester
Colour Fastness to light
Flame Retardancy
Abrasion resistance
Antibacterial, Antifungal and Antimycotic Protection
Anti-Stain finish
Anti-static finish

Faux Leather Finish
Taupe



Woven Fabric Finish Glass

Composition 100% Polypropylene

Weight 220 g/m²

Flammability EN 1021-1 (cigarette) // BS 476 Part 7 Class 1 (Adhered)
EN 13501-1 (SBI) Adhered Class B, s2, d0

Light Fastness 6 (ISO 105 - B02)

Fastness to Rubbing Wet: 4, Dry: 4 (ISO 105 - X12)

Certified to the EU Ecolabel

Certified to Indoor Advantage™ Gold

Cleaning Vacuum regularly, wipe with a damp cloth using a proprietary upholstery shampoo/soap. For deeper cleaning, use bleach or alcohol.

Bleach Cleanable ISO 105 E03 colour change 4 for dilution factor 1:4 chlorine solution



Woven Fabric Finish Easdale

Composition 100% Polypropylene

Weight 220 g/m²

Flammability EN 1021-1 (cigarette) // BS 476 Part 7 Class 1 (Adhered)
EN 13501-1 (SBI) Adhered Class B, s2, d0

Light Fastness 6 (ISO 105 - B02)


Fastness to Rubbing Wet: 4, Dry: 4 (ISO 105 - X12)

Certified to the EU Ecolabel

Certified to Indoor Advantage™ Gold

Cleaning Vacuum regularly, wipe with a damp cloth using a proprietary upholstery shampoo/soap. For deeper cleaning, use bleach or alcohol.

Bleach Cleanable ISO 105 E03 colour change 4 for dilution factor 1:4 chlorine solution



Woven Fabric Finish

Lead

Composition 100% Polypropylene

Weight 220 g/m²

Flammability EN 1021-1 (cigarette) // BS 476 Part 7 Class 1 (Adhered)
EN 13501-1 (SBI) Adhered Class B, s2, d0

Light Fastness 6 (ISO 105 - B02)

Fastness to Rubbing Wet: 4, Dry: 4 (ISO 105 - X12)

Certified to the EU Ecolabel

Certified to Indoor Advantage™ Gold

Cleaning Vacuum regularly, wipe with a damp cloth using a proprietary upholstery shampoo/soap. For deeper cleaning, use bleach or alcohol.

Bleach Cleanable ISO 105 E03 colour change 4 for dilution factor 1:4 chlorine solution



Woven Fabric Finish

Beltane

Composition 100% Polypropylene

Weight 220 g/m²

Flammability EN 1021-1 (cigarette) // BS 476 Part 7 Class 1 (Adhered)
EN 13501-1 (SBI) Adhered Class B, s2, d0

Light Fastness 6 (ISO 105 - B02)

Fastness to Rubbing Wet: 4, Dry: 4 (ISO 105 - X12)

Certified to the EU Ecolabel


Certified to Indoor Advantage™ Gold

Cleaning Vacuum regularly, wipe with a damp cloth using a proprietary upholstery shampoo/soap. For deeper cleaning, use bleach or alcohol.

Bleach Cleanable ISO 105 E03 colour change 4 for dilution factor 1:4 chlorine solution


Technical File

Klever Line - Floor Screen | Acrylic Guard

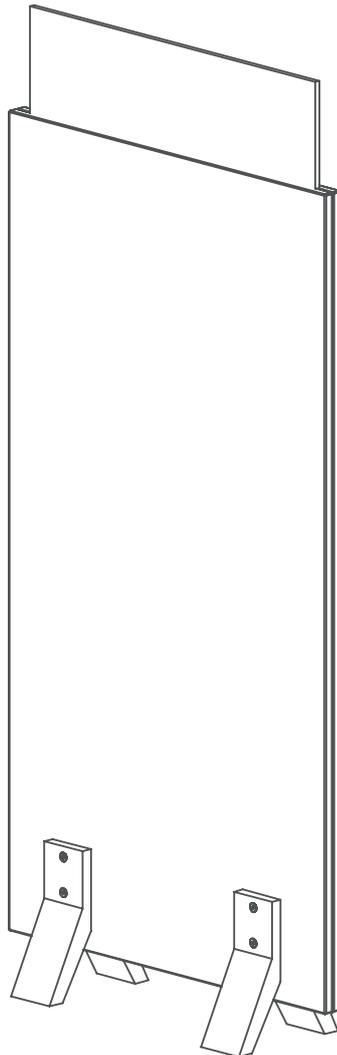

01

Dimensions

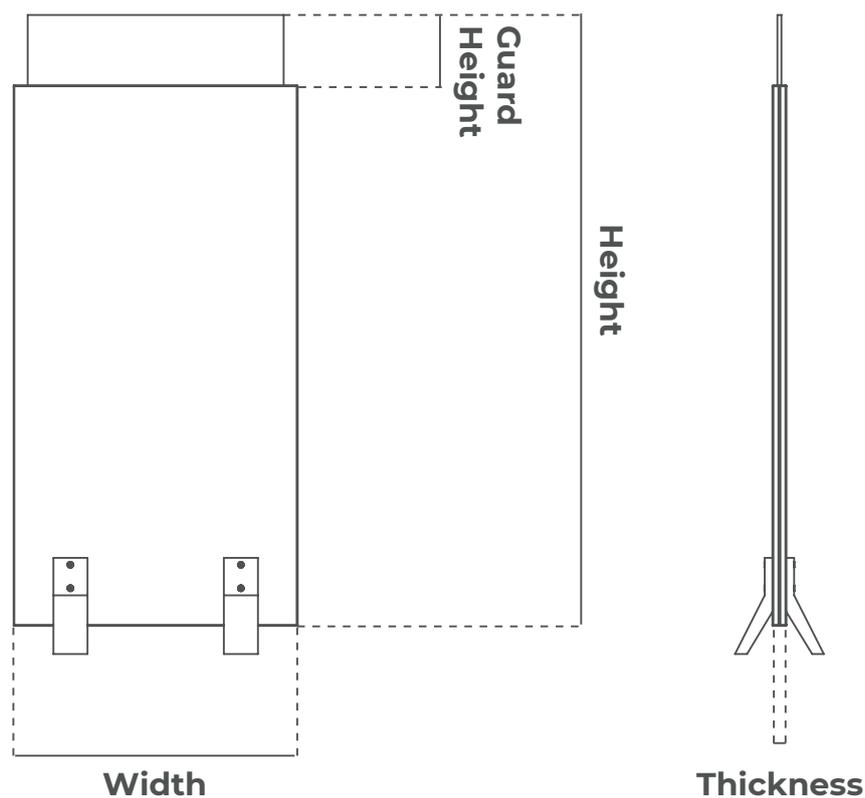

Floor Screen | Acrylic Guard

Width: 600mm	Height: 1350mm	Acrylic Guard Height: 150mm	Thickness: 28mm
Width: 600mm	Height: 1650mm	Acrylic Guard Height: 150mm	Thickness: 28mm
Width: 800mm	Height: 1350mm	Acrylic Guard Height: 150mm	Thickness: 28mm
Width: 800mm	Height: 1650mm	Acrylic Guard Height: 150mm	Thickness: 28mm

02

Finishes



Composition 100% Polyester
Colour Fastness to light DIN 54004
Flame Retardancy DIN 4102 B2
Abrasion resistance 300.000 cycles
Antibacterial, Antifungal and Antimycotic Protection
Anti-Stain finish
Anti-static finish

Faux Leather Finish
Auster



Composition 100% Polyester
Colour Fastness to light
Flame Retardancy
Abrasion resistance
Antibacterial, Antifungal and Antimycotic Protection
Anti-Stain finish
Anti-static finish

Faux Leather Finish
Leinen




Composition 100% Polyester
Colour Fastness to light
Flame Retardancy DIN 4102 B2
Abrasion resistance 300.000 cycles
Antibacterial, Antifungal and Antimycotic Protection
Anti-Stain finish
Anti-static finish

Faux Leather Finish
Pure White



Composition 100% Polyester
Colour Fastness to light
Flame Retardancy
Abrasion resistance
Antibacterial, Antifungal and Antimycotic Protection
Anti-Stain finish
Anti-static finish

Faux Leather Finish
Taupe



Woven Fabric Finish Glass

Composition 100% Polypropylene

Weight 220 g/m²

Flammability EN 1021-1 (cigarette) // BS 476 Part 7 Class 1 (Adhered)
EN 13501-1 (SBI) Adhered Class B, s2, d0

Light Fastness 6 (ISO 105 - B02)

Fastness to Rubbing Wet: 4, Dry: 4 (ISO 105 - X12)

Certified to the EU Ecolabel

Certified to Indoor Advantage™ Gold

Cleaning Vacuum regularly, wipe with a damp cloth using a proprietary upholstery shampoo/soap. For deeper cleaning, use bleach or alcohol.

Bleach Cleanable ISO 105 E03 colour change 4 for dilution factor 1:4 chlorine solution



Woven Fabric Finish Easdale

Composition 100% Polypropylene

Weight 220 g/m²

Flammability EN 1021-1 (cigarette) // BS 476 Part 7 Class 1 (Adhered)
EN 13501-1 (SBI) Adhered Class B, s2, d0

Light Fastness 6 (ISO 105 - B02)


Fastness to Rubbing Wet: 4, Dry: 4 (ISO 105 - X12)

Certified to the EU Ecolabel

Certified to Indoor Advantage™ Gold

Cleaning Vacuum regularly, wipe with a damp cloth using a proprietary upholstery shampoo/soap. For deeper cleaning, use bleach or alcohol.

Bleach Cleanable ISO 105 E03 colour change 4 for dilution factor 1:4 chlorine solution



Woven Fabric Finish Lead

Composition 100% Polypropylene

Weight 220 g/m²

Flammability EN 1021-1 (cigarette) // BS 476 Part 7 Class 1 (Adhered)
EN 13501-1 (SBI) Adhered Class B, s2, d0

Light Fastness 6 (ISO 105 - B02)


Fastness to Rubbing Wet: 4, Dry: 4 (ISO 105 - X12)

Certified to the EU Ecolabel

Certified to Indoor Advantage™ Gold

Cleaning Vacuum regularly, wipe with a damp cloth using a proprietary upholstery shampoo/soap. For deeper cleaning, use bleach or alcohol.

Bleach Cleanable ISO 105 E03 colour change 4 for dilution factor 1:4 chlorine solution



Woven Fabric Finish
Beltane

Composition 100% Polypropylene

Weight 220 g/m²

Flammability EN 1021-1 (cigarette) // BS 476 Part 7 Class 1 (Adhered)

EN 13501-1 (SBI) Adhered Class B, s2, d0

Light Fastness 6 (ISO 105 - B02)

Fastness to Rubbing Wet: 4, Dry: 4 (ISO 105 - X12)

Certified to the EU Ecolabel

Certified to Indoor Advantage™ Gold

Cleaning Vacuum regularly, wipe with a damp cloth using a proprietary upholstery shampoo/soap. For deeper cleaning, use bleach or alcohol.

Bleach Cleanable ISO 105 E03 colour change 4 for dilution factor 1:4 chlorine solution



Acrylic
Clear

Thickness 8 mm

Transparency Clear
