



# Technical File

## Aura Cloud F CIR

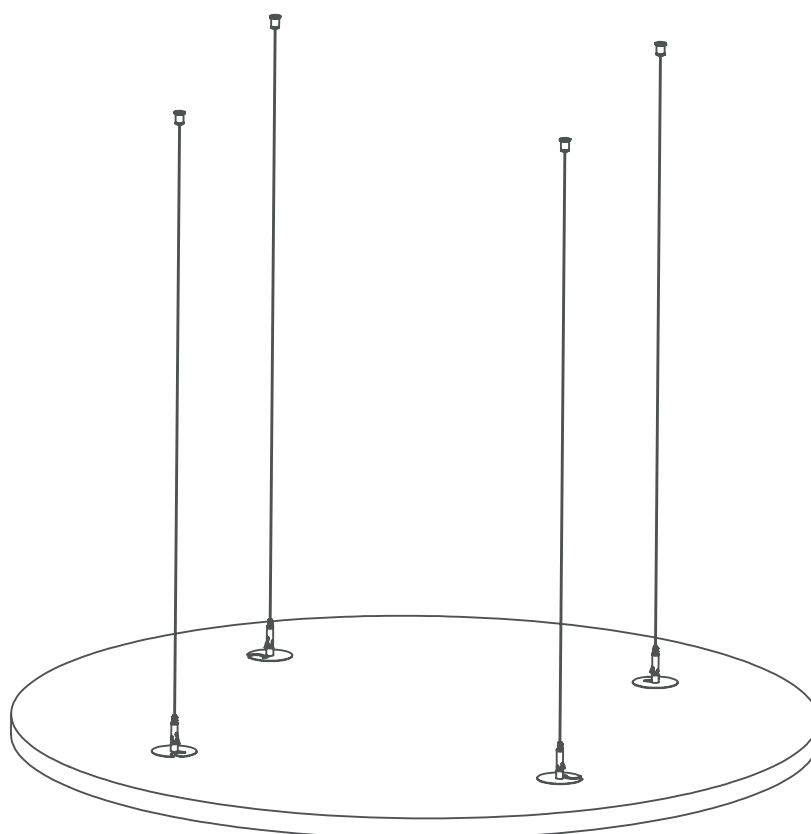

# 01

## Dimensions

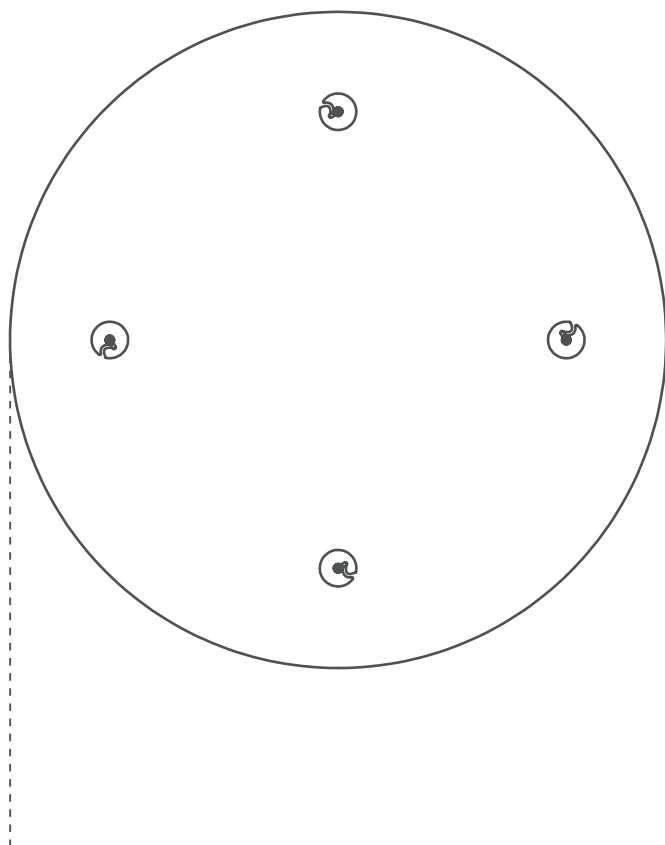

**Diameter**



**Thickness**

Aura Cloud F CIR

Ø 1150 Thickness: 40 mm


# 02

## Finishes




**Composition** 100% Polyester  
**Weight** 200 gr/m<sup>2</sup>  
**Thickness** 1,75 mm  
**Colour Fastness to light** EN ISSO 105-B02: 6-7  
**Flame Retardancy** EN 13501-1: B-s1,d0  
**Abrasion resistance** 50 000 Cycles  
**STANDARD 100 by OEKO-TEX®**

**Felt | Solid Colour**  
Pearl




**Composition** 100% Polyester  
**Weight** 200 gr/m<sup>2</sup>  
**Thickness** 1,75 mm  
**Colour Fastness to light** EN ISSO 105-B02: 6-7  
**Flame Retardancy** EN 13501-1: B-s1,d0  
**Abrasion resistance** 50 000 Cycles  
**STANDARD 100 by OEKO-TEX®**

**Felt | Solid Colour**  
Storm



**Composition** 100% Polyester  
**Weight** 200 gr/m<sup>2</sup>  
**Thickness** 1,75 mm  
**Colour Fastness to light** EN ISSO 105-B02: 6-7  
**Flame Retardancy** EN 13501-1: B-s1,d0  
**Abrasion resistance** 50 000 Cycles  
**STANDARD 100 by OEKO-TEX®**

**Felt | Solid Colour**  
Indigo Blue




**Composition** 100% Polyester  
**Weight** 200 gr/m<sup>2</sup>  
**Thickness** 1,75 mm  
**Colour Fastness to light** EN ISSO 105-B02: 6-7  
**Flame Retardancy** EN 13501-1: B-s1,d0  
**Abrasion resistance** 50 000 Cycles  
**STANDARD 100 by OEKO-TEX®**

**Felt | Melange Finish**  
Pewter



**Composition** 100% Polyester  
**Weight** 200 gr/m<sup>2</sup>  
**Thickness** 1,75 mm  
**Colour Fastness to light** EN ISSO 105-B02: 6-7  
**Flame Retardancy** EN 13501-1: B-s1,d0  
**Abrasion resistance** 50 000 Cycles  
**STANDARD 100 by OEKO-TEX®**

**Felt | Melange Finish**  
Espresso




**Composition** 100% Polyester  
**Weight** 200 gr/m<sup>2</sup>  
**Thickness** 1,75 mm  
**Colour Fastness to light** EN ISO 105-B02: 6-7  
**Flame Retardancy** EN 13501-1: B-s1,d0  
**Abrasion resistance** 50 000 Cycles  
**STANDARD 100 by OEKO-TEX®**

**Felt | Melange Finish**  
Lemon




**Composition** 100% Polyester  
**Weight** 200 gr/m<sup>2</sup>  
**Thickness** 1,75 mm  
**Colour Fastness to light** EN ISO 105-B02: 6-7  
**Flame Retardancy** EN 13501-1: B-s1,d0  
**Abrasion resistance** 50 000 Cycles  
**STANDARD 100 by OEKO-TEX®**

**Felt | Melange Finish**  
Ruby



**Composition** 100% Polyester  
**Weight** 200 gr/m<sup>2</sup>  
**Thickness** 1,75 mm  
**Colour Fastness to light** EN ISO 105-B02: 6-7  
**Flame Retardancy** EN 13501-1: B-s1,d0  
**Abrasion resistance** 50 000 Cycles  
**STANDARD 100 by OEKO-TEX®**

**Felt | Melange Finish**  
Kelly




**Composition** 100% Polyester  
**Weight** 200 gr/m<sup>2</sup>  
**Thickness** 1,75 mm  
**Colour Fastness to light** EN ISO 105-B02: 6-7  
**Flame Retardancy** EN 13501-1: B-s1,d0  
**Abrasion resistance** 50 000 Cycles  
**STANDARD 100 by OEKO-TEX®**

**Felt | Melange Finish**  
Cerulean


# Technical File

## Aura Cloud Print Double SQR

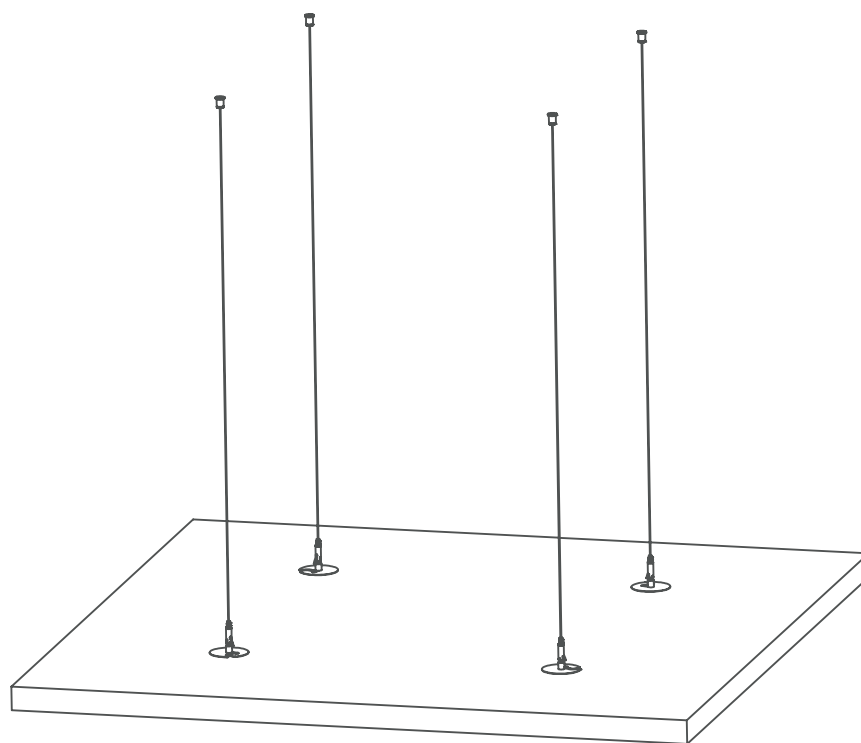

# 01

## Dimensions

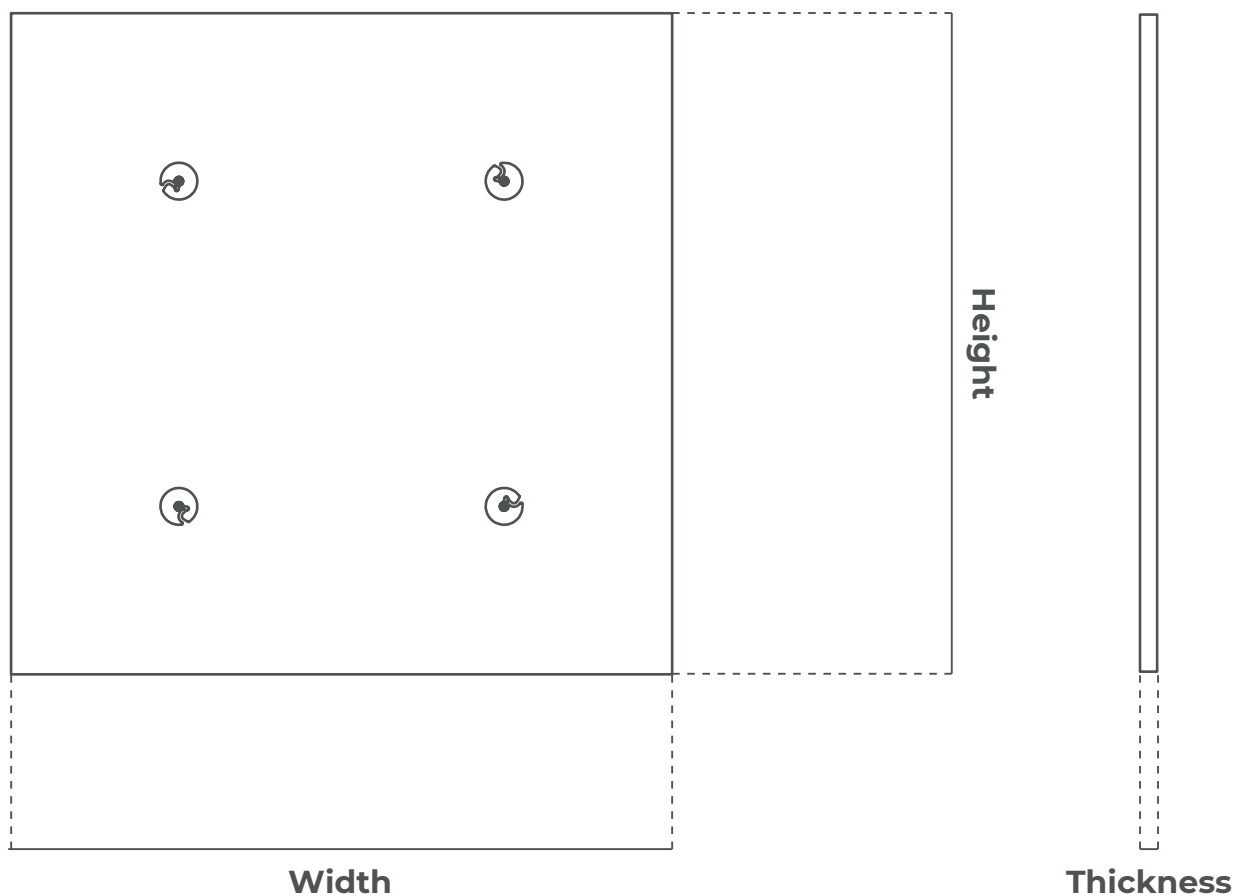

### Aura Cloud Print Double SQR

Width: 1150 mm   Height: 1150 mm   Thickness: 40 mm


# 02

## Finishes



**Composition** 100% PET  
**Thickness** 40 mm  
**Flame Retardancy** EN 13501-1: B-s1,d0  
**Acoustic Absorption Coefficient** Class B (0,85)  
**STANDARD 100 by OEKO-TEX®**

**Print Finish**  
Plaster



**Composition** 100% PET  
**Thickness** 40 mm  
**Flame Retardancy** EN 13501-1: B-s1,d0  
**Acoustic Absorption Coefficient** Class B (0,85)  
**STANDARD 100 by OEKO-TEX®**

**Print Finish**  
Concrete



**Composition** 100% PET  
**Thickness** 40 mm  
**Flame Retardancy** EN 13501-1: B-s1,d0  
**Acoustic Absorption Coefficient** Class B (0,85)  
**STANDARD 100 by OEKO-TEX®**

**Print Finish**  
Vintage Wood



**Composition** 100% PET  
**Thickness** 40 mm  
**Flame Retardancy** EN 13501-1: B-s1,d0  
**Acoustic Absorption Coefficient** Class B (0,85)  
**STANDARD 100 by OEKO-TEX®**

**Print Finish**  
Dunes



**Composition** 100% PET  
**Thickness** 40 mm  
**Flame Retardancy** EN 13501-1: B-s1,d0  
**Acoustic Absorption Coefficient** Class B (0,85)  
**STANDARD 100 by OEKO-TEX®**

**Print Finish**  
Marble



**Composition** 100% PET  
**Thickness** 40 mm  
**Flame Retardancy** EN 13501-1: B-s1,d0  
**Acoustic Absorption Coefficient** Class B (0,85)  
**STANDARD 100 by OEKO-TEX®**

**Print Finish**  
White Rock

---



**Composition** 100% PET  
**Thickness** 40 mm  
**Flame Retardancy** EN 13501-1: B-s1,d0  
**Acoustic Absorption Coefficient** Class B (0,85)  
**STANDARD 100 by OEKO-TEX®**

**Print Finish**  
Mineral Grey

---



**Composition** 100% PET  
**Thickness** 40 mm  
**Flame Retardancy** EN 13501-1: B-s1,d0  
**Acoustic Absorption Coefficient** Class B (0,85)  
**STANDARD 100 by OEKO-TEX®**

**Print Finish**  
Smoky Grey

---



**Composition** 100% PET  
**Thickness** 40 mm  
**Flame Retardancy** EN 13501-1: B-s1,d0  
**Acoustic Absorption Coefficient** Class B (0,85)  
**STANDARD 100 by OEKO-TEX®**

**Print Finish**  
Beige Baryte

---

**Composition** 100% PET  
**Thickness** 40 mm  
**Flame Retardancy** EN 13501-1: B-s1,d0  
**Acoustic Absorption Coefficient** Class B (0,85)  
**STANDARD 100 by OEKO-TEX®**





**Composition** 100% PET  
**Thickness** 40 mm  
**Flame Retardancy** EN 13501-1: B-s1,d0  
**Acoustic Absorption Coefficient** Class B (0,85)  
**STANDARD 100 by OEKO-TEX®**

**Print Finish**  
Yellow Amber

---



**Composition** 100% PET  
**Thickness** 40 mm  
**Flame Retardancy** EN 13501-1: B-s1,d0  
**Acoustic Absorption Coefficient** Class B (0,85)  
**STANDARD 100 by OEKO-TEX®**

**Print Finish**  
Green Fluorite

---



**Composition** 100% PET  
**Thickness** 40 mm  
**Flame Retardancy** EN 13501-1: B-s1,d0  
**Acoustic Absorption Coefficient** Class B (0,85)  
**STANDARD 100 by OEKO-TEX®**

**Print Finish**  
Pink Topaz

---



**Composition** 100% PET  
**Thickness** 40 mm  
**Flame Retardancy** EN 13501-1: B-s1,d0  
**Acoustic Absorption Coefficient** Class B (0,85)  
**STANDARD 100 by OEKO-TEX®**


**Print Finish**  
Aquamarine Blue

---

**Composition** 100% PET  
**Thickness** 40 mm  
**Flame Retardancy** EN 13501-1: B-s1,d0  
**Acoustic Absorption Coefficient** Class B (0,85)  
**STANDARD 100 by OEKO-TEX®**


# Technical File

## Aura Cloud Print CIR

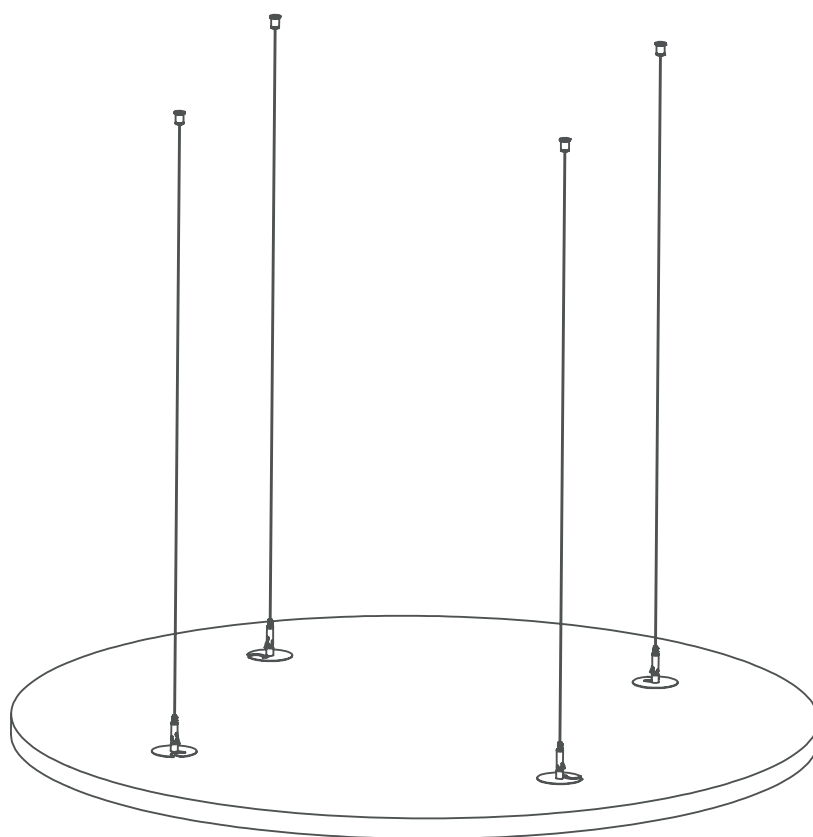

# 01

## Dimensions

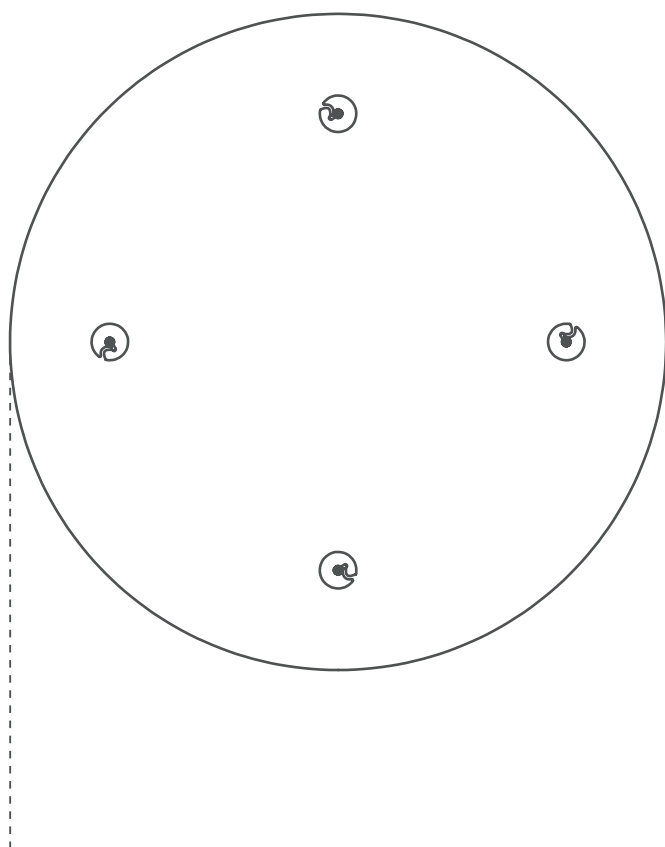

**Diameter**



**Thickness**

Aura Cloud Print CIR

Ø 1150 Thickness: 40 mm


# 02

## Finishes



**Composition** 100% PET  
**Thickness** 40 mm  
**Flame Retardancy** EN 13501-1: B-s1,d0  
**Acoustic Absorption Coefficient** Class B (0,85)  
**STANDARD 100 by OEKO-TEX®**

**Print Finish**  
Plaster



**Composition** 100% PET  
**Thickness** 40 mm  
**Flame Retardancy** EN 13501-1: B-s1,d0  
**Acoustic Absorption Coefficient** Class B (0,85)  
**STANDARD 100 by OEKO-TEX®**

**Print Finish**  
Concrete



**Composition** 100% PET  
**Thickness** 40 mm  
**Flame Retardancy** EN 13501-1: B-s1,d0  
**Acoustic Absorption Coefficient** Class B (0,85)  
**STANDARD 100 by OEKO-TEX®**

**Print Finish**  
Vintage Wood



**Composition** 100% PET  
**Thickness** 40 mm  
**Flame Retardancy** EN 13501-1: B-s1,d0  
**Acoustic Absorption Coefficient** Class B (0,85)  
**STANDARD 100 by OEKO-TEX®**

**Print Finish**  
Dunes



**Composition** 100% PET  
**Thickness** 40 mm  
**Flame Retardancy** EN 13501-1: B-s1,d0  
**Acoustic Absorption Coefficient** Class B (0,85)  
**STANDARD 100 by OEKO-TEX®**

**Print Finish**  
Marble



**Composition** 100% PET  
**Thickness** 40 mm  
**Flame Retardancy** EN 13501-1: B-s1,d0  
**Acoustic Absorption Coefficient** Class B (0,85)  
**STANDARD 100 by OEKO-TEX®**

**Print Finish**  
White Rock

---



**Composition** 100% PET  
**Thickness** 40 mm  
**Flame Retardancy** EN 13501-1: B-s1,d0  
**Acoustic Absorption Coefficient** Class B (0,85)  
**STANDARD 100 by OEKO-TEX®**

**Print Finish**  
Mineral Grey

---



**Composition** 100% PET  
**Thickness** 40 mm  
**Flame Retardancy** EN 13501-1: B-s1,d0  
**Acoustic Absorption Coefficient** Class B (0,85)  
**STANDARD 100 by OEKO-TEX®**

**Print Finish**  
Smoky Grey

---



**Composition** 100% PET  
**Thickness** 40 mm  
**Flame Retardancy** EN 13501-1: B-s1,d0  
**Acoustic Absorption Coefficient** Class B (0,85)  
**STANDARD 100 by OEKO-TEX®**

**Print Finish**  
Beige Baryte

---



**Composition** 100% PET  
**Thickness** 40 mm  
**Flame Retardancy** EN 13501-1: B-s1,d0  
**Acoustic Absorption Coefficient** Class B (0,85)  
**STANDARD 100 by OEKO-TEX®**

**Print Finish**  
Yellow Amber

---



**Composition** 100% PET  
**Thickness** 40 mm  
**Flame Retardancy** EN 13501-1: B-s1,d0  
**Acoustic Absorption Coefficient** Class B (0,85)  
**STANDARD 100 by OEKO-TEX®**

**Print Finish**  
Green Fluorite

---



**Composition** 100% PET  
**Thickness** 40 mm  
**Flame Retardancy** EN 13501-1: B-s1,d0  
**Acoustic Absorption Coefficient** Class B (0,85)  
**STANDARD 100 by OEKO-TEX®**

**Print Finish**  
Pink Topaz

---




**Composition** 100% PET  
**Thickness** 40 mm  
**Flame Retardancy** EN 13501-1: B-s1,d0  
**Acoustic Absorption Coefficient** Class B (0,85)  
**STANDARD 100 by OEKO-TEX®**

**Print Finish**  
Aquamarine Blue

---


# Technical File

## Aura Cloud F Double SQR

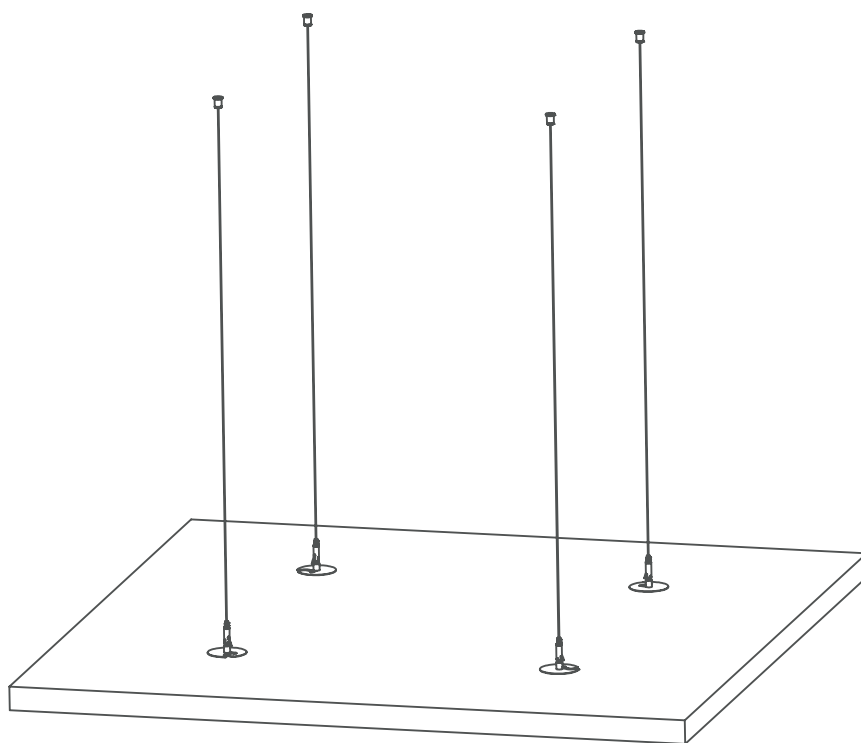

# 01

## Dimensions

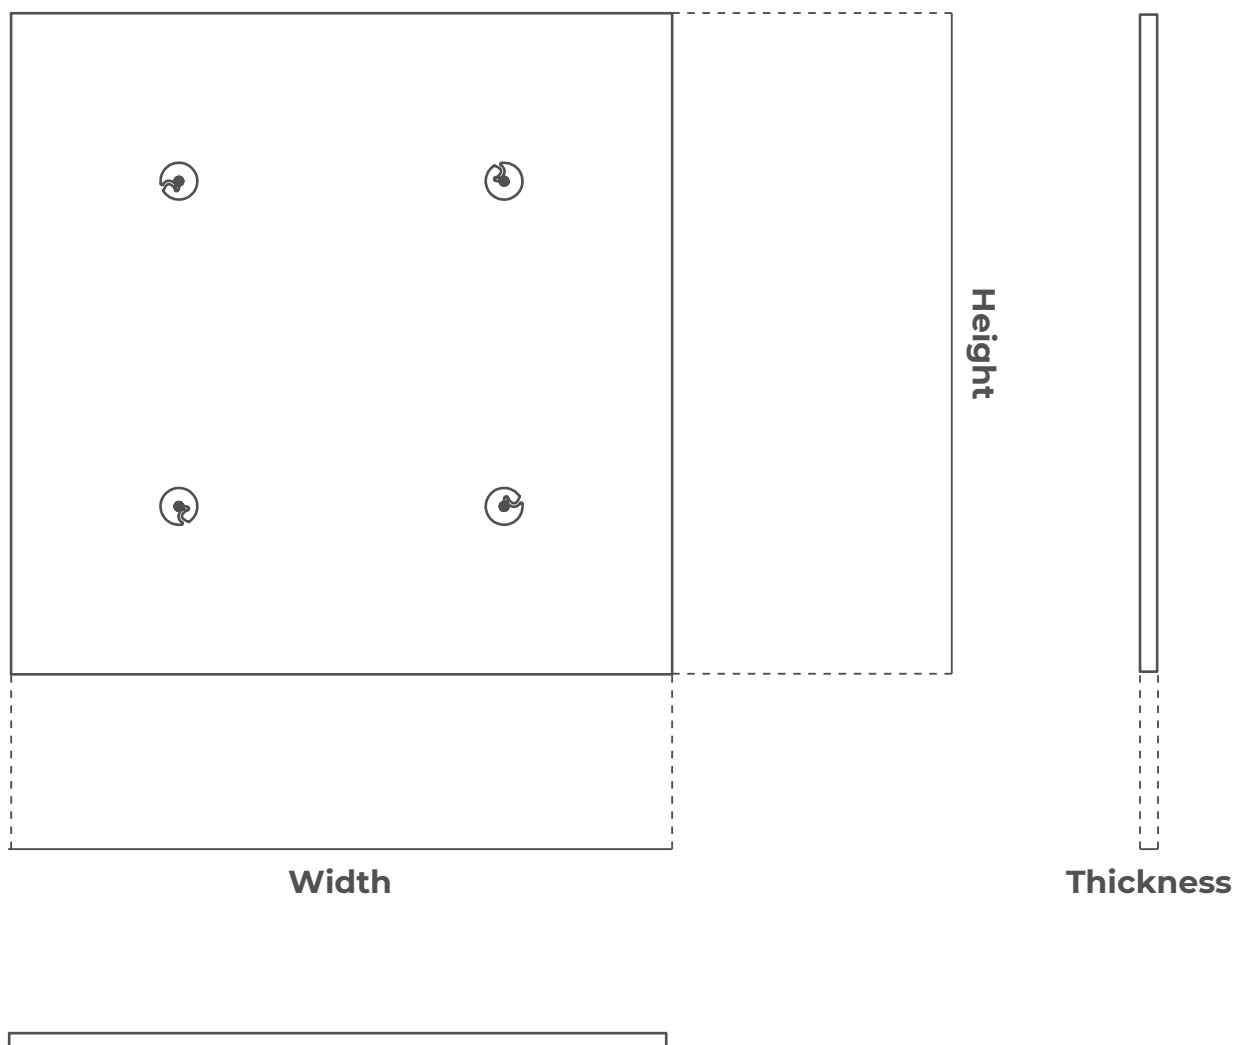

### Aura Cloud F Double SQR

Width: 1150 mm   Height: 1150 mm   Thickness: 40 mm




# 02

## Finishes




**Composition** 100% Polyester  
**Weight** 200 gr/m<sup>2</sup>  
**Thickness** 1,75 mm  
**Colour Fastness to light** EN ISO 105-B02: 6-7  
**Flame Retardancy** EN 13501-1: B-s1,d0  
**Abrasion resistance** 50 000 Cycles  
**STANDARD 100 by OEKO-TEX®**

**Felt | Solid Colour**  
Pearl




**Composition** 100% Polyester  
**Weight** 200 gr/m<sup>2</sup>  
**Thickness** 1,75 mm  
**Colour Fastness to light** EN ISO 105-B02: 6-7  
**Flame Retardancy** EN 13501-1: B-s1,d0  
**Abrasion resistance** 50 000 Cycles  
**STANDARD 100 by OEKO-TEX®**

**Felt | Solid Colour**  
Storm



**Composition** 100% Polyester  
**Weight** 200 gr/m<sup>2</sup>  
**Thickness** 1,75 mm  
**Colour Fastness to light** EN ISO 105-B02: 6-7  
**Flame Retardancy** EN 13501-1: B-s1,d0  
**Abrasion resistance** 50 000 Cycles  
**STANDARD 100 by OEKO-TEX®**

**Felt | Solid Colour**  
Indigo Blue




**Composition** 100% Polyester  
**Weight** 200 gr/m<sup>2</sup>  
**Thickness** 1,75 mm  
**Colour Fastness to light** EN ISO 105-B02: 6-7  
**Flame Retardancy** EN 13501-1: B-s1,d0  
**Abrasion resistance** 50 000 Cycles  
**STANDARD 100 by OEKO-TEX®**

**Felt | Melange Finish**  
Pewter



**Composition** 100% Polyester  
**Weight** 200 gr/m<sup>2</sup>  
**Thickness** 1,75 mm  
**Colour Fastness to light** EN ISO 105-B02: 6-7  
**Flame Retardancy** EN 13501-1: B-s1,d0  
**Abrasion resistance** 50 000 Cycles  
**STANDARD 100 by OEKO-TEX®**

**Felt | Melange Finish**  
Espresso




**Composition** 100% Polyester  
**Weight** 200 gr/m<sup>2</sup>  
**Thickness** 1,75 mm  
**Colour Fastness to light** EN ISSO 105-B02: 6-7  
**Flame Retardancy** EN 13501-1: B-s1,d0  
**Abrasion resistance** 50 000 Cycles  
**STANDARD 100 by OEKO-TEX®**

**Felt | Melange Finish**  
Lemon




**Composition** 100% Polyester  
**Weight** 200 gr/m<sup>2</sup>  
**Thickness** 1,75 mm  
**Colour Fastness to light** EN ISSO 105-B02: 6-7  
**Flame Retardancy** EN 13501-1: B-s1,d0  
**Abrasion resistance** 50 000 Cycles  
**STANDARD 100 by OEKO-TEX®**

**Felt | Melange Finish**  
Ruby



**Composition** 100% Polyester  
**Weight** 200 gr/m<sup>2</sup>  
**Thickness** 1,75 mm  
**Colour Fastness to light** EN ISSO 105-B02: 6-7  
**Flame Retardancy** EN 13501-1: B-s1,d0  
**Abrasion resistance** 50 000 Cycles  
**STANDARD 100 by OEKO-TEX®**

**Felt | Melange Finish**  
Kelly



**Composition** 100% Polyester  
**Weight** 200 gr/m<sup>2</sup>  
**Thickness** 1,75 mm  
**Colour Fastness to light** EN ISSO 105-B02: 6-7  
**Flame Retardancy** EN 13501-1: B-s1,d0  
**Abrasion resistance** 50 000 Cycles  
**STANDARD 100 by OEKO-TEX®**

**Felt | Melange Finish**  
Cerulean