





Technical File

Myriad

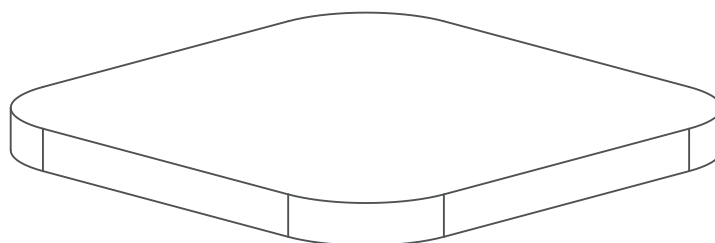

01

Dimensions

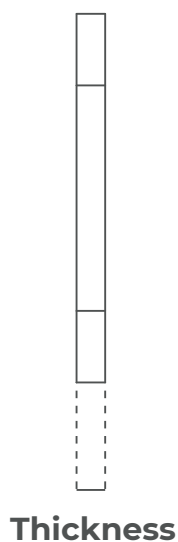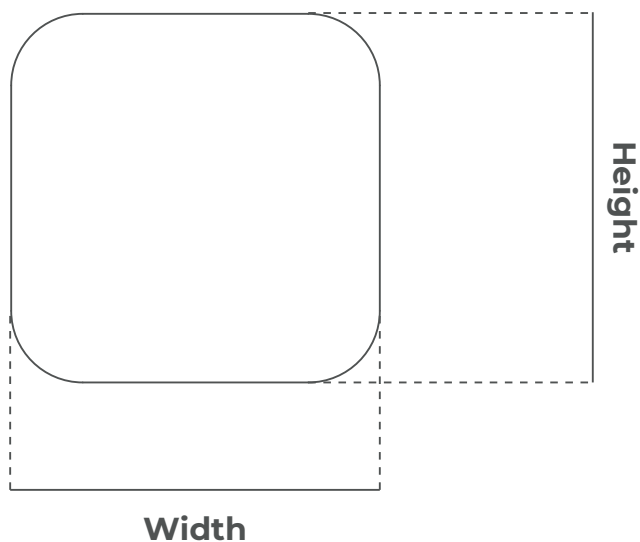

Myriad


Width: 257 mm Height: 257 mm Thickness: 20 mm
Width: 257 mm Height: 257 mm Thickness: 40 mm

Finishes




Composition 100% Polyester
Weight 200 gr/m²
Thickness 1,75 mm
Colour Fastness to light EN ISO 105-B02: 6-7
Flame Retardancy EN 13501-1: B-s1,d0
Abrasion resistance 50 000 Cycles
STANDARD 100 by OEKO-TEX®

Felt Finish
Pearl




Composition 100% Polyester
Weight 200 gr/m²
Thickness 1,75 mm
Colour Fastness to light EN ISO 105-B02: 6-7
Flame Retardancy EN 13501-1: B-s1,d0
Abrasion resistance 50 000 Cycles
STANDARD 100 by OEKO-TEX®

Felt Finish
Storm




Composition 100% Polyester
Weight 200 gr/m²
Thickness 1,75 mm
Colour Fastness to light EN ISO 105-B02: 6-7
Flame Retardancy EN 13501-1: B-s1,d0
Abrasion resistance 50 000 Cycles
STANDARD 100 by OEKO-TEX®

Felt Finish
Indigo Blue




Composition 100% Polyester
Weight 200 gr/m²
Thickness 1,75 mm
Colour Fastness to light EN ISO 105-B02: 6-7
Flame Retardancy EN 13501-1: B-s1,d0
Abrasion resistance 50 000 Cycles
STANDARD 100 by OEKO-TEX®

Felt Finish
Pewter



Composition 100% Polyester
Weight 200 gr/m²
Thickness 1,75 mm
Colour Fastness to light EN ISO 105-B02: 6-7
Flame Retardancy EN 13501-1: B-s1,d0
Abrasion resistance 50 000 Cycles
STANDARD 100 by OEKO-TEX®

Felt Finish
Espresso




Composition 100% Polyester
Weight 200 gr/m²
Thickness 1,75 mm
Colour Fastness to light EN ISSO 105-B02: 6-7
Flame Retardancy EN 13501-1: B-s1,d0
Abrasion resistance 50 000 Cycles
STANDARD 100 by OEKO-TEX®

Felt Finish
Lemon




Composition 100% Polyester
Weight 200 gr/m²
Thickness 1,75 mm
Colour Fastness to light EN ISSO 105-B02: 6-7
Flame Retardancy EN 13501-1: B-s1,d0
Abrasion resistance 50 000 Cycles
STANDARD 100 by OEKO-TEX®

Felt Finish
Ruby



Composition 100% Polyester
Weight 200 gr/m²
Thickness 1,75 mm
Colour Fastness to light EN ISSO 105-B02: 6-7
Flame Retardancy EN 13501-1: B-s1,d0
Abrasion resistance 50 000 Cycles
STANDARD 100 by OEKO-TEX®

Felt Finish
Kelly



Composition 100% Polyester
Weight 200 gr/m²
Thickness 1,75 mm
Colour Fastness to light EN ISSO 105-B02: 6-7
Flame Retardancy EN 13501-1: B-s1,d0
Abrasion resistance 50 000 Cycles
STANDARD 100 by OEKO-TEX®

Felt Finish
Cerulean



Composition 100% PET
Thickness 20/40 mm
Flame Retardancy EN 13501-1: B-s1,d0
Acoustic Absorption Coefficient Class B (0,85)
STANDARD 100 by OEKO-TEX®

Print Finish
White Rock



Composition 100% PET
Thickness 20/40 mm
Flame Retardancy EN 13501-1: B-s1,d0
Acoustic Absorption Coefficient Class B (0,85)
STANDARD 100 by OEKO-TEX®

Print Finish
Mineral Grey



Composition 100% PET
Thickness 20/40 mm
Flame Retardancy EN 13501-1: B-s1,d0
Acoustic Absorption Coefficient Class B (0,85)
STANDARD 100 by OEKO-TEX®

Print Finish
Smoky Grey



Composition 100% PET
Thickness 20/40 mm
Flame Retardancy EN 13501-1: B-s1,d0
Acoustic Absorption Coefficient Class B (0,85)
STANDARD 100 by OEKO-TEX®

Print Finish
Beige Baryte



Composition 100% PET
Thickness 20/40 mm
Flame Retardancy EN 13501-1: B-s1,d0
Acoustic Absorption Coefficient Class B (0,85)
STANDARD 100 by OEKO-TEX®

Print Finish
Yellow Amber



Composition 100% PET
Thickness 20/40 mm
Flame Retardancy EN 13501-1: B-s1,d0
Acoustic Absorption Coefficient Class B (0,85)
STANDARD 100 by OEKO-TEX®

Print Finish
Green Fluorite



Composition 100% PET
Thickness 20/40 mm
Flame Retardancy EN 13501-1: B-s1,d0
Acoustic Absorption Coefficient Class B (0,85)
STANDARD 100 by OEKO-TEX®

Print Finish
Pink Topaz




Composition 100% PET
Thickness 20/40 mm
Flame Retardancy EN 13501-1: B-s1,d0
Acoustic Absorption Coefficient Class B (0,85)
STANDARD 100 by OEKO-TEX®

Print Finish
Aquamarine Blue



Technical File

Myriad Dimi

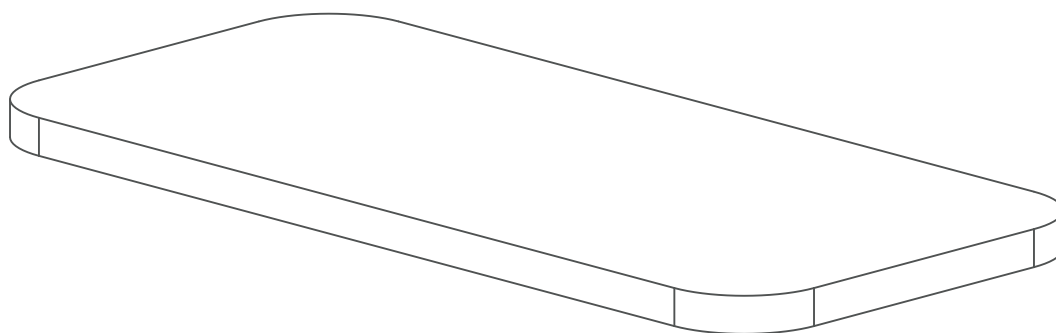

01

Dimensions

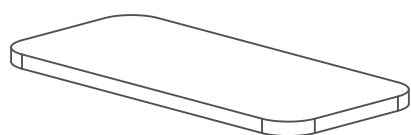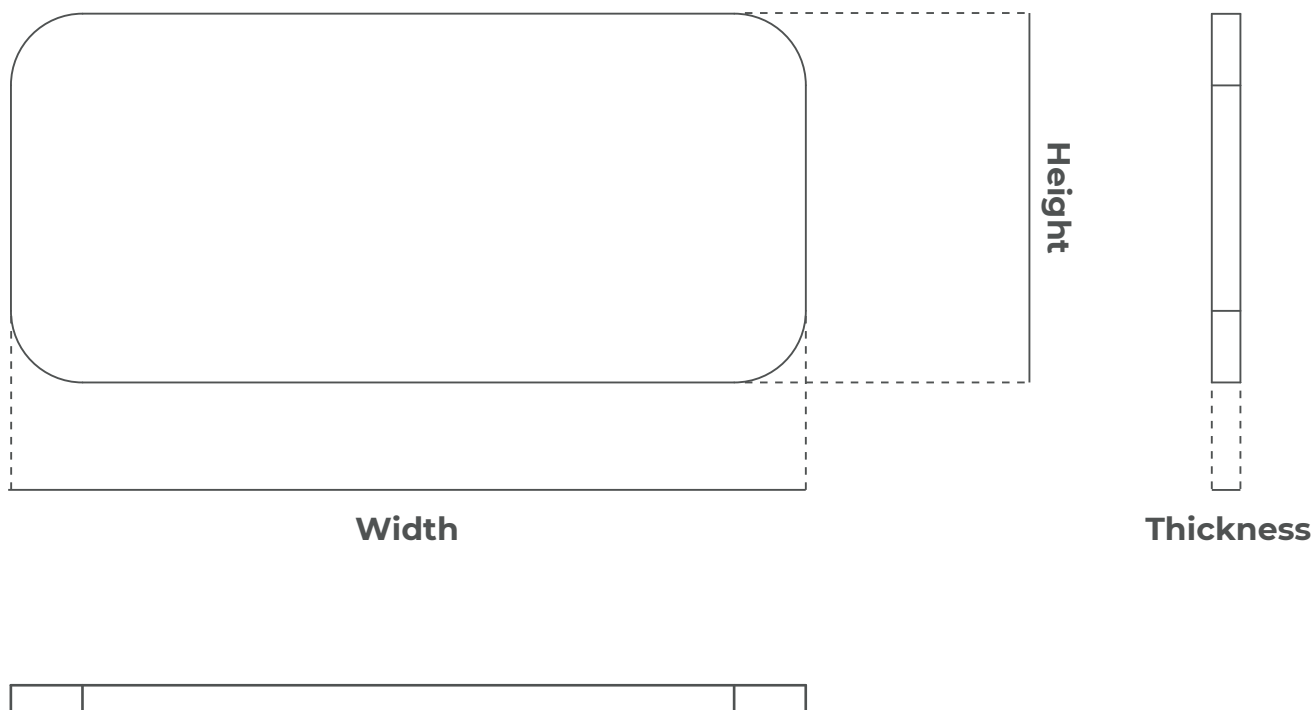

Myriad Dimi

Width: 555 mm Height: 257 mm Thickness: 20 mm
Width: 555 mm Height: 257 mm Thickness: 40 mm


02

Finishes




Composition 100% Polyester
Weight 200 gr/m²
Thickness 1,75 mm
Colour Fastness to light EN ISSO 105-B02: 6-7
Flame Retardancy EN 13501-1: B-s1,d0
Abrasion resistance 50 000 Cycles
STANDARD 100 by OEKO-TEX®

Felt Finish
Pearl




Composition 100% Polyester
Weight 200 gr/m²
Thickness 1,75 mm
Colour Fastness to light EN ISSO 105-B02: 6-7
Flame Retardancy EN 13501-1: B-s1,d0
Abrasion resistance 50 000 Cycles
STANDARD 100 by OEKO-TEX®

Felt Finish
Storm



Composition 100% Polyester
Weight 200 gr/m²
Thickness 1,75 mm
Colour Fastness to light EN ISSO 105-B02: 6-7
Flame Retardancy EN 13501-1: B-s1,d0
Abrasion resistance 50 000 Cycles
STANDARD 100 by OEKO-TEX®

Felt Finish
Indigo Blue




Composition 100% Polyester
Weight 200 gr/m²
Thickness 1,75 mm
Colour Fastness to light EN ISSO 105-B02: 6-7
Flame Retardancy EN 13501-1: B-s1,d0
Abrasion resistance 50 000 Cycles
STANDARD 100 by OEKO-TEX®

Felt Finish
Pewter



Composition 100% Polyester
Weight 200 gr/m²
Thickness 1,75 mm
Colour Fastness to light EN ISSO 105-B02: 6-7
Flame Retardancy EN 13501-1: B-s1,d0
Abrasion resistance 50 000 Cycles
STANDARD 100 by OEKO-TEX®

Felt Finish
Espresso




Composition 100% Polyester
Weight 200 gr/m²
Thickness 1,75 mm
Colour Fastness to light EN ISSO 105-B02: 6-7
Flame Retardancy EN 13501-1: B-s1,d0
Abrasion resistance 50 000 Cycles
STANDARD 100 by OEKO-TEX®

Felt Finish
Lemon




Composition 100% Polyester
Weight 200 gr/m²
Thickness 1,75 mm
Colour Fastness to light EN ISSO 105-B02: 6-7
Flame Retardancy EN 13501-1: B-s1,d0
Abrasion resistance 50 000 Cycles
STANDARD 100 by OEKO-TEX®

Felt Finish
Ruby



Composition 100% Polyester
Weight 200 gr/m²
Thickness 1,75 mm
Colour Fastness to light EN ISSO 105-B02: 6-7
Flame Retardancy EN 13501-1: B-s1,d0
Abrasion resistance 50 000 Cycles
STANDARD 100 by OEKO-TEX®

Felt Finish
Kelly



Composition 100% Polyester
Weight 200 gr/m²
Thickness 1,75 mm
Colour Fastness to light EN ISSO 105-B02: 6-7
Flame Retardancy EN 13501-1: B-s1,d0
Abrasion resistance 50 000 Cycles
STANDARD 100 by OEKO-TEX®

Felt Finish
Cerulean




Composition 100% PET
Thickness 20/40 mm
Flame Retardancy EN 13501-1: B-s1,d0
Acoustic Absorption Coefficient Class B (0,85)
STANDARD 100 by OEKO-TEX®

Print Finish
White Rock



Composition 100% PET
Thickness 20/40 mm
Flame Retardancy EN 13501-1: B-s1,d0
Acoustic Absorption Coefficient Class B (0,85)
STANDARD 100 by OEKO-TEX®

Print Finish
Mineral Grey



Composition 100% PET
Thickness 20/40 mm
Flame Retardancy EN 13501-1: B-s1,d0
Acoustic Absorption Coefficient Class B (0,85)
STANDARD 100 by OEKO-TEX®

Print Finish
Smoky Grey



Composition 100% PET
Thickness 20/40 mm
Flame Retardancy EN 13501-1: B-s1,d0
Acoustic Absorption Coefficient Class B (0,85)
STANDARD 100 by OEKO-TEX®

Print Finish
Beige Baryte



Composition 100% PET
Thickness 20/40 mm
Flame Retardancy EN 13501-1: B-s1,d0
Acoustic Absorption Coefficient Class B (0,85)
STANDARD 100 by OEKO-TEX®

Print Finish
Yellow Amber



Composition 100% PET
Thickness 20/40 mm
Flame Retardancy EN 13501-1: B-s1,d0
Acoustic Absorption Coefficient Class B (0,85)
STANDARD 100 by OEKO-TEX®

Print Finish
Green Fluorite



Composition 100% PET
Thickness 20/40 mm
Flame Retardancy EN 13501-1: B-s1,d0
Acoustic Absorption Coefficient Class B (0,85)
STANDARD 100 by OEKO-TEX®

Print Finish
Pink Topaz



Composition 100% PET
Thickness 20/40 mm
Flame Retardancy EN 13501-1: B-s1,d0
Acoustic Absorption Coefficient Class B (0,85)
STANDARD 100 by OEKO-TEX®

Print Finish
Aquamarine Blue
